

## AMC-ANT-MHJ-1401E

### MARUWA multi-band GNSS L1/L2 antenna (B1, L1, E1, G1, L2)

#### Features

- Bands: B1, L1, E1, G1, L2
- Frequencies: 1227.60MHz, 1575.42MHz
- Negligible de-tuning in cluttered, dielectric loaded environments (hand-held, body-worn, close proximity to objects)
- Filters against interference from cellular and ISM bands

The AMC-ANT-MHJ-1401E multi-band GNSS active antenna from MARUWA uses Sarantel's distinctive technology to provide unrivalled circularly-polarised gain from a uniquely small volume. It enables excellent performance in tightly integrated devices that require good positional accuracy. By combining a high quality dielectric antenna with a high performance low-noise amplifier, the AMC-ANT-MHJ-1401E active antenna provides an excellent solution for applications needing active gain input.

#### Suggested Applications


- Asset tracking
- Handheld devices
- UAV/AUV
- Vehicles
- Emergency location
- Seismic monitoring/measuring
- Wildlife tracking
- Marine tracking




(in mm)



Parameter	Specifications	Units
Cover Band	B1, L1, E1, G1, L2	-
Gain (Passive)	1 (@1575.42MHz)	dBic (Typ)
	-1 (@1227.60MHz)	dBic (Typ)
Gain (Active)	31 (@1575.42MHz)	dBic (Typ)
	29 (@1227.60MHz)	dBic (Typ)
Voltage	2.7 → 5.5	V
Current	28	mA (Typ)
Beamwidth	135 (@1575.42MHz)	Degrees (Typ)
	115 (@1227.60MHz)	Degrees (Typ)
Axial Ratio	<3.0	dB (at zenith)
VSWR	<2.0	-
Impedance	50	Ohms
Noise figure	2.8	dB
Waterproof	IP67	-
Operating Temp	-40 → +85	°C
Weight	31	grams

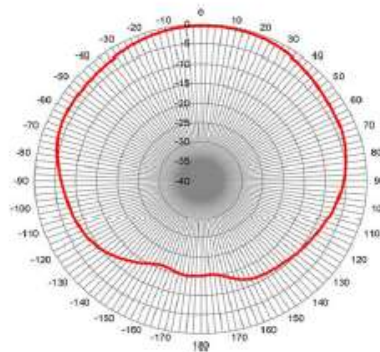

L1:@1575.42MHz

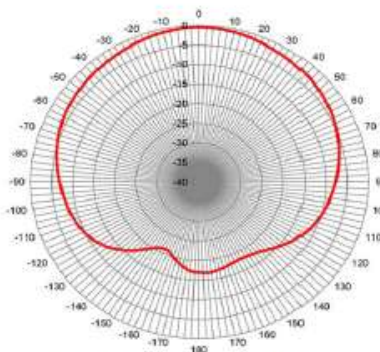

L2:@1227.6MHz

