

## AMC-ANT-2JP0615P

433MHz ISM rigid fibreglass PCB antenna

### Features

- 433MHz ISM
  - 433 - 435MHz
- Self-adhesive
- Ground plane independent
- Dimensions: 104 x 8.5 x 0.8mm
- Customisable cable and connector



## 1. Antenna and electrical specifications

<b>Parameters</b>	433MHz ISM antenna
<b>Standards</b>	ISM, LoRa
<b>Band (MHz)</b>	433
<b>Frequency (MHz)</b>	433 - 435
<b>Return Loss (dB)</b>	~-23.7
<b>VSWR</b>	~1.1:1
<b>Efficiency (%)</b>	~32.6
<b>Peak Gain (dBi)</b>	~-2.6
<b>Average Gain (dB)</b>	~-4.9
<b>Impedance (Ohms)</b>	50
<b>Polarisation</b>	Linear
<b>Radiation Pattern</b>	Omni-directional
<b>Max. Input Power (W)</b>	25
<b>Connector Type</b>	U.FL standard (other connectors available)
<b>Cable Length</b>	250mm standard (other cable lengths available)
<b>Cable Type</b>	1.37mm mini coax standard (other cables available)


### Antenna measurement conditions:

- Mounted on 30 x 30 x 0.25cm ABS plate
- 250mm 1.37mm cable
- Measured in certified CTIA 3D anechoic chamber







## 2. Mechanical and environmental specifications



<b>Mounting Type</b>	Self-adhesive
<b>Dimensions (mm)</b>	104 x 8.5 x 0.8
<b>Adhesive Type</b>	3M 467
<b>Material</b>	Rigid fibreglass
<b>Operating Temperature (°C)</b>	-40 to +85
<b>Storage Temperature (°C)</b>	-40 to +85
<b>Substance Compliance</b>	RoHS

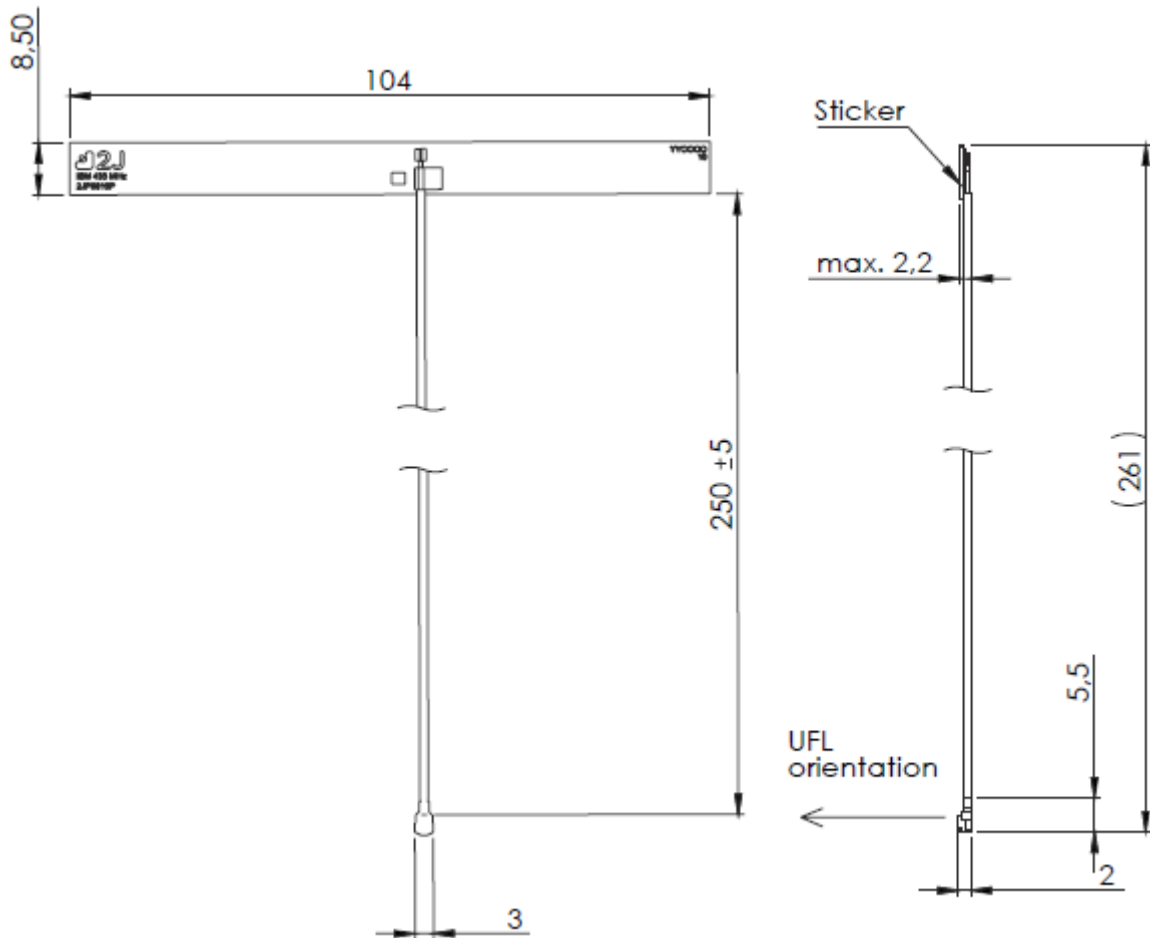

### 3. Antenna parameters

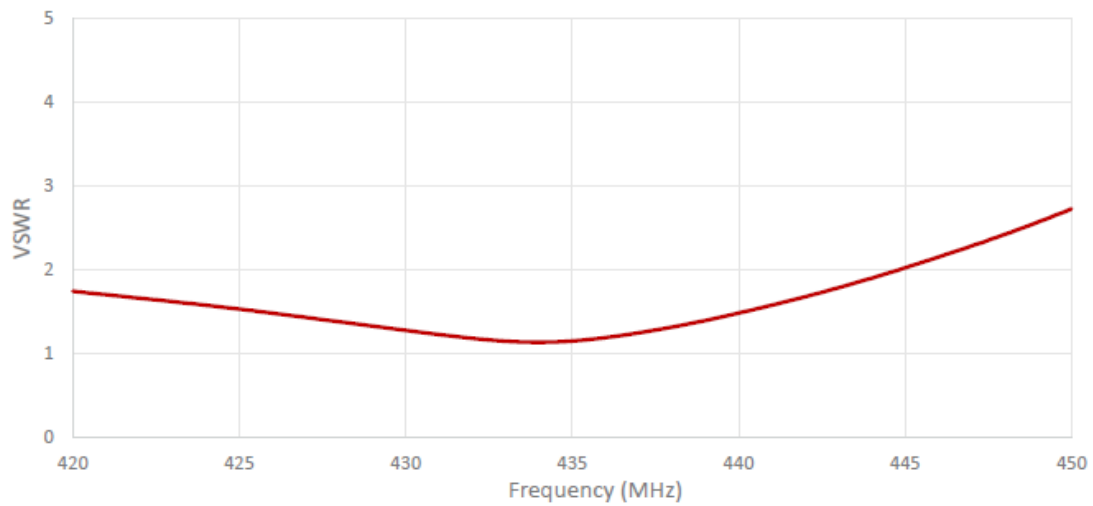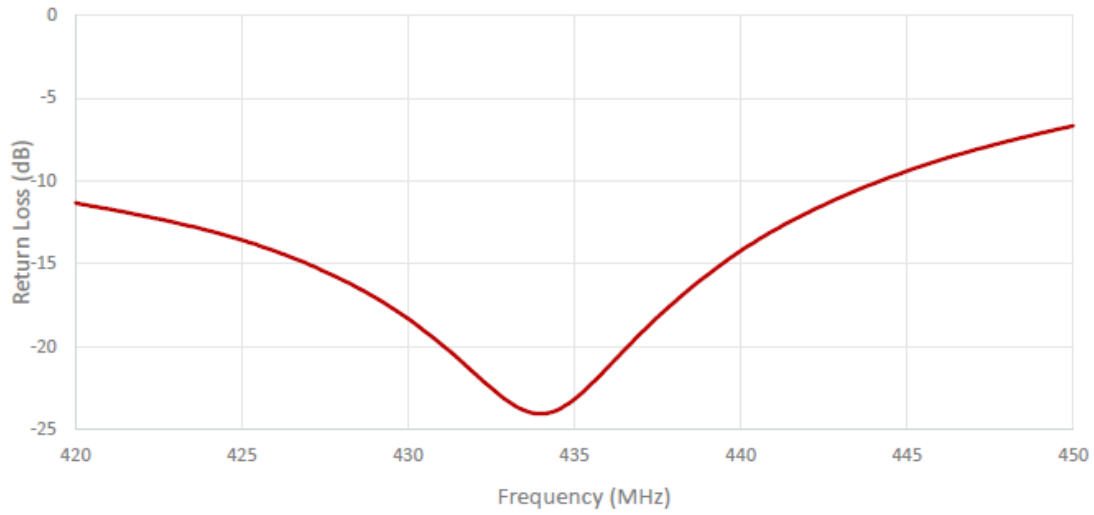


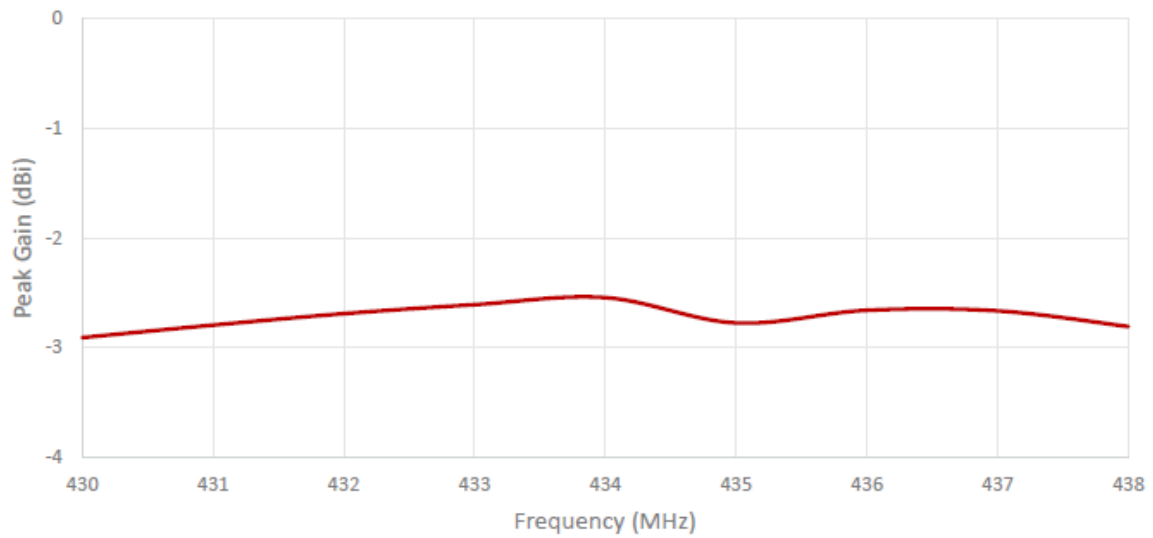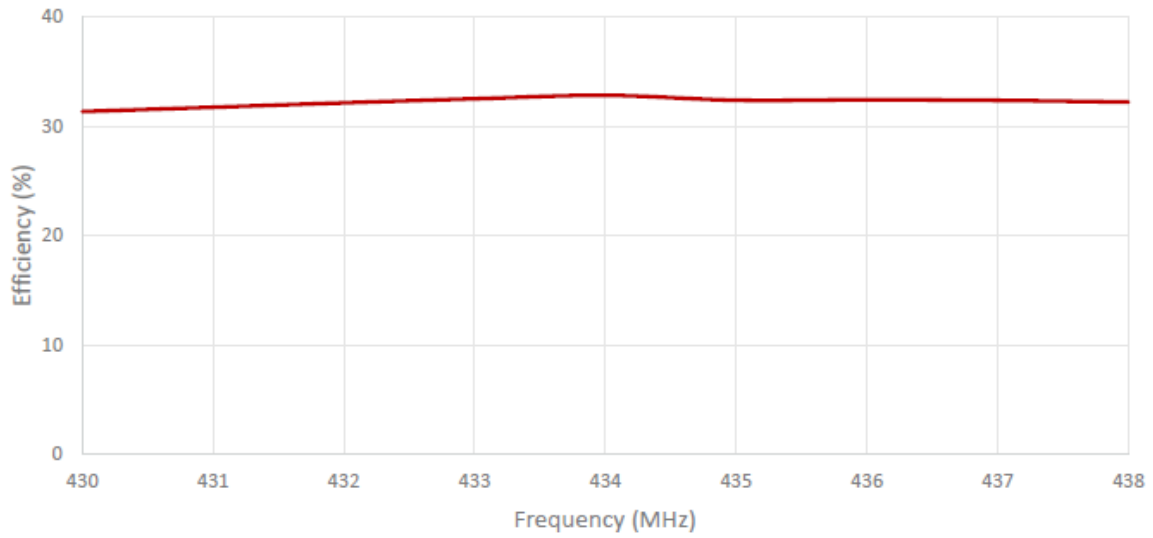

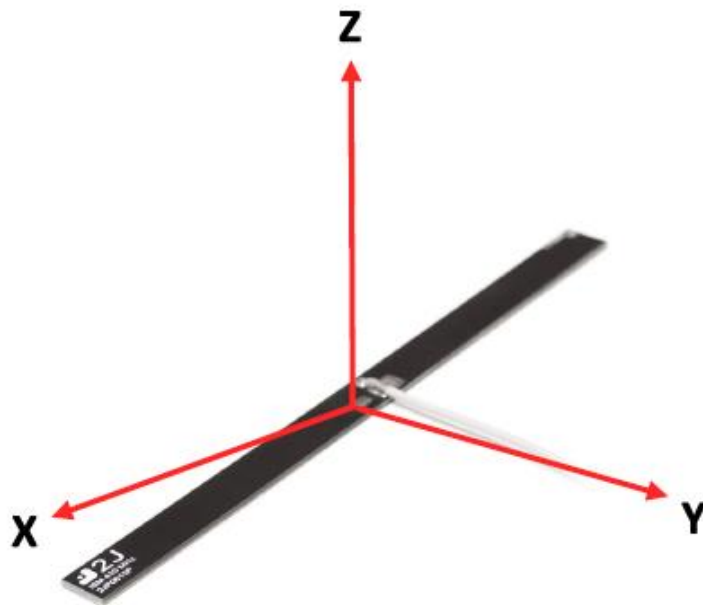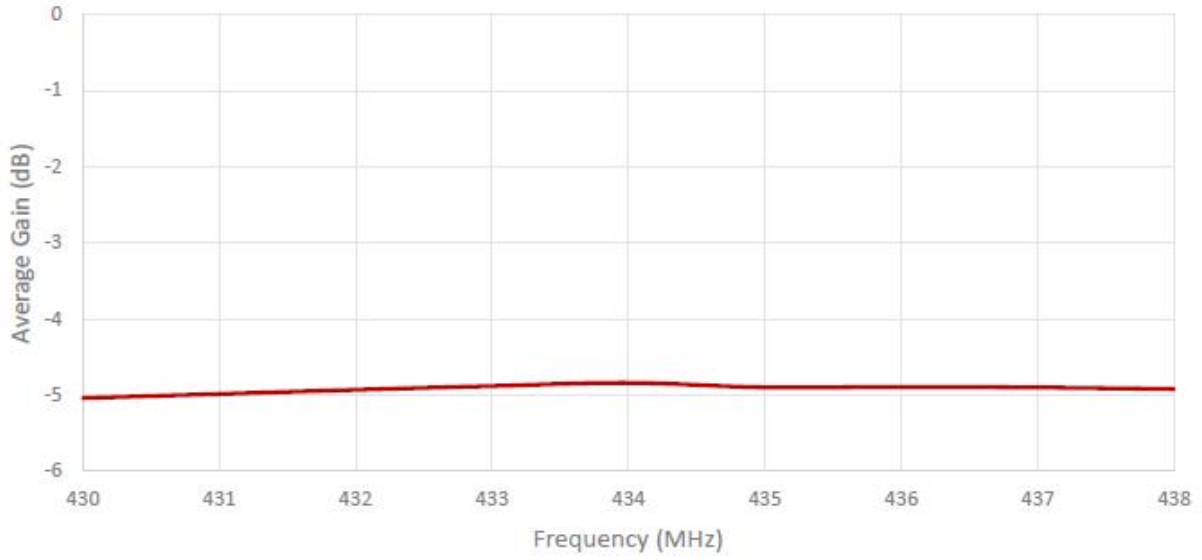

Radiation pattern reference



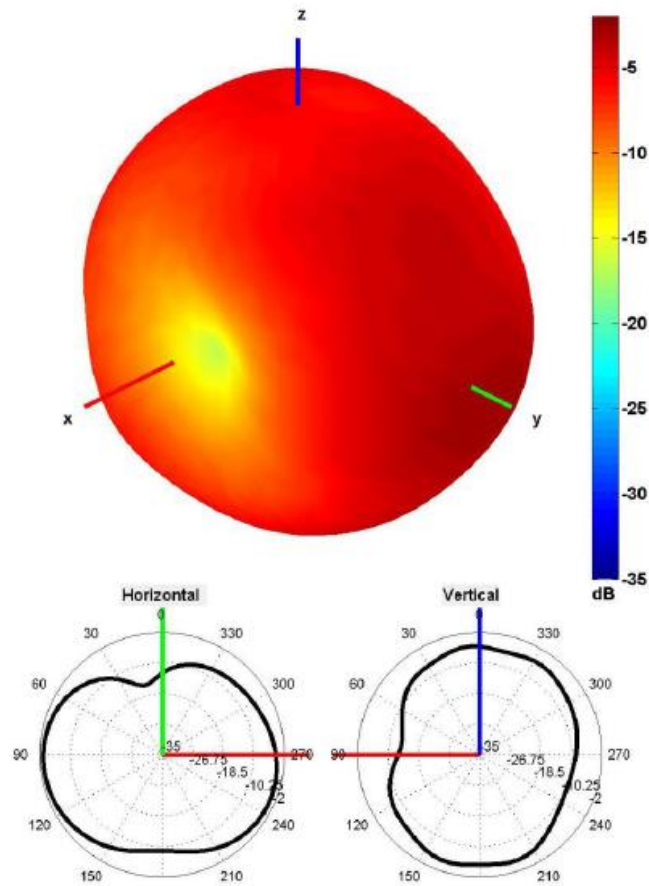

433 MHz Radiation pattern

