

AMC-ANT-2JW1002

2.4/5.0GHz ISM hinged connector mount antenna

Features

- 2.4/5.0GHz ISM
 - 2410 – 2490MHz
 - 4920 – 5925MHz
- Ground plane dependent
- Low profile
- Hinged connector mount
- High efficiency
- Dimensions: \varnothing 10 x 71mm



1. Antenna and electrical specifications

Parameters	2.4GHz ISM antenna	
Standards	Wi-Fi, Bluetooth, ZigBee, ISM	
Band (MHz)	2.4GHz	5.0GHz
Frequency (MHz)	2410 - 2490	4920 -5925
Return loss (dB)	~-10.7	~-7.4
VSWR	~1.8:1	~2.8:1
Efficiency (%)	~59	~45
Peak gain (dBi)	~3.0	~1.0
Average gain (dB)	~-2.3	~-3.5
Impedance (Ohms)	50	
Polarisation	Linear	
Radiation pattern	Omni-Directional	
Max. input power (W)	25	
Connector type	RP-SMA male standard	


Measurement conditions:

- Mounted on a ground plane of 70 x 35mm
- Measured in certified CTIA 3D anechoic chamber







2. Mechanical and environmental specifications



Mounting type	Connector mount
Dimensions (mm)	71 x Ø 10
Radome	POM
Radome colour	Black
Operating temperature (°C)	-20 to +65
Storage temperature (°C)	-40 to +85
Substance compliance	RoHS

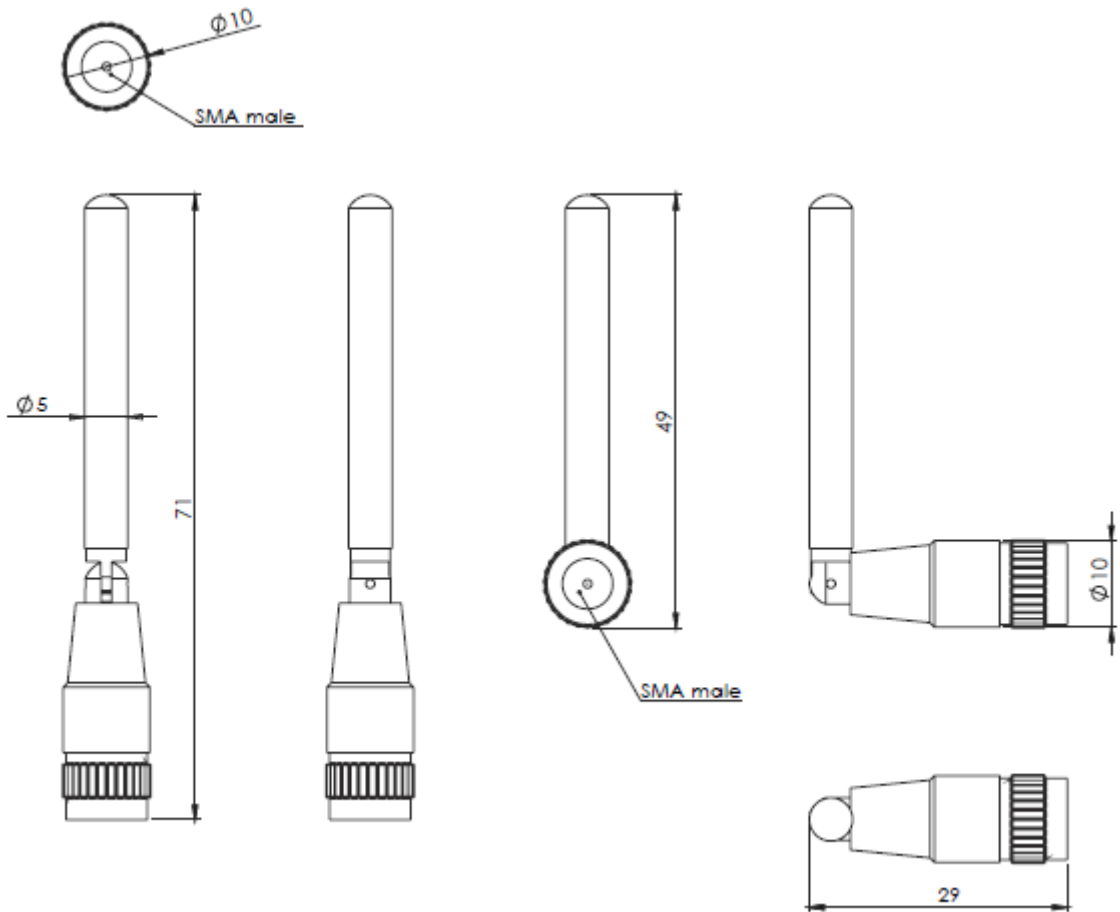

3. Antenna parameters

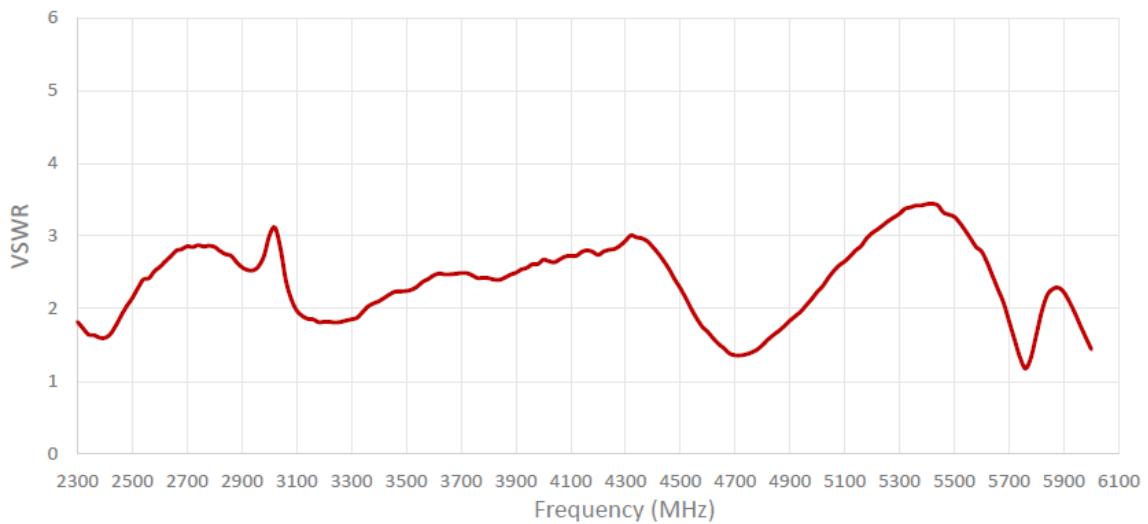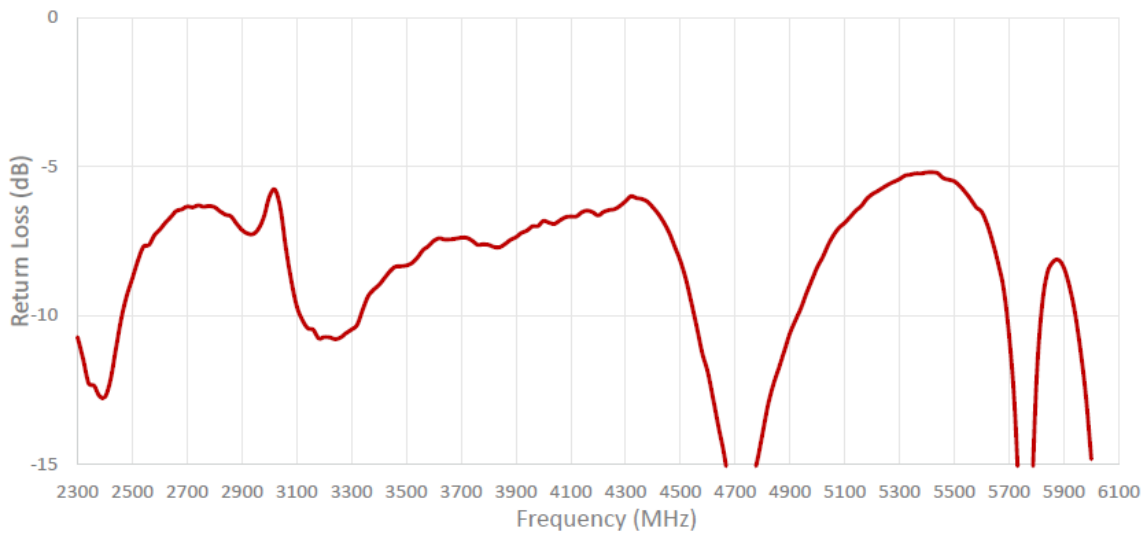


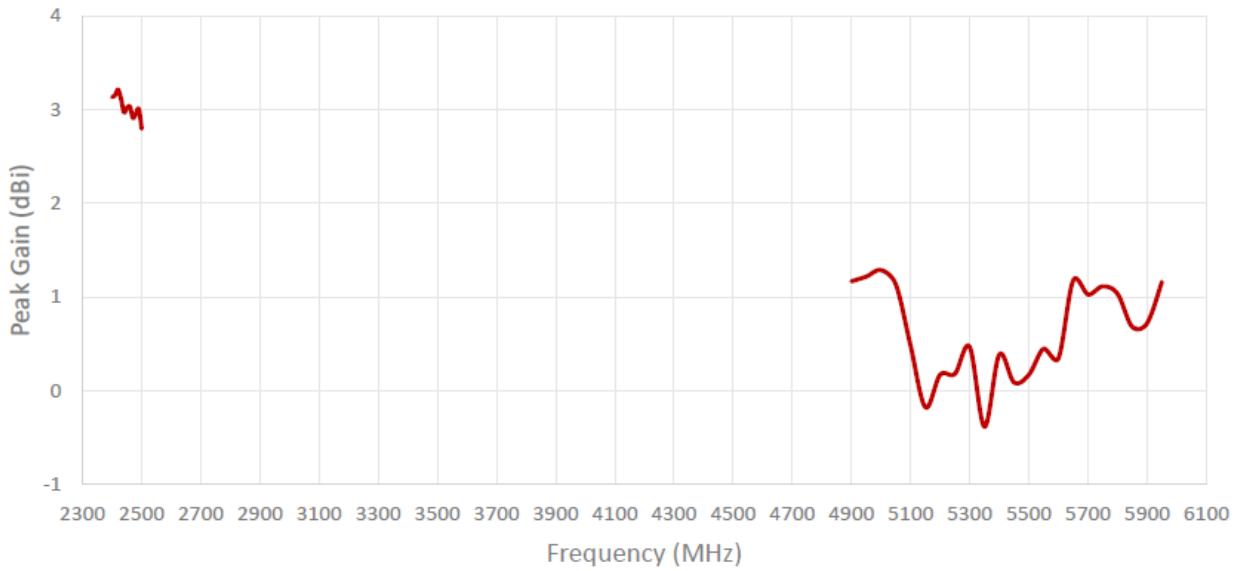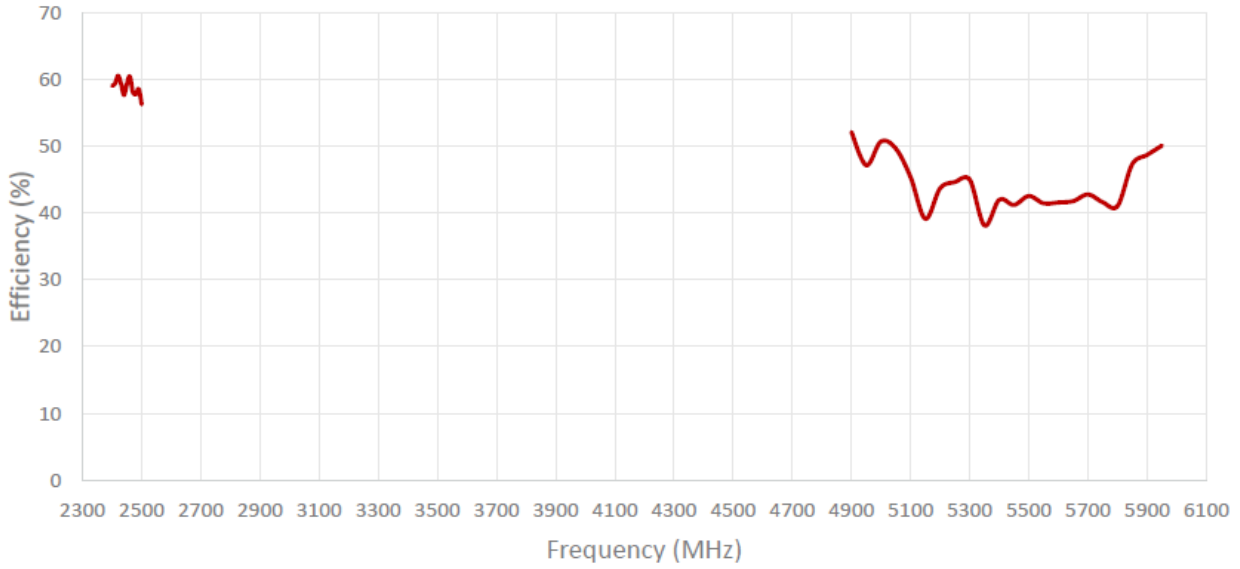

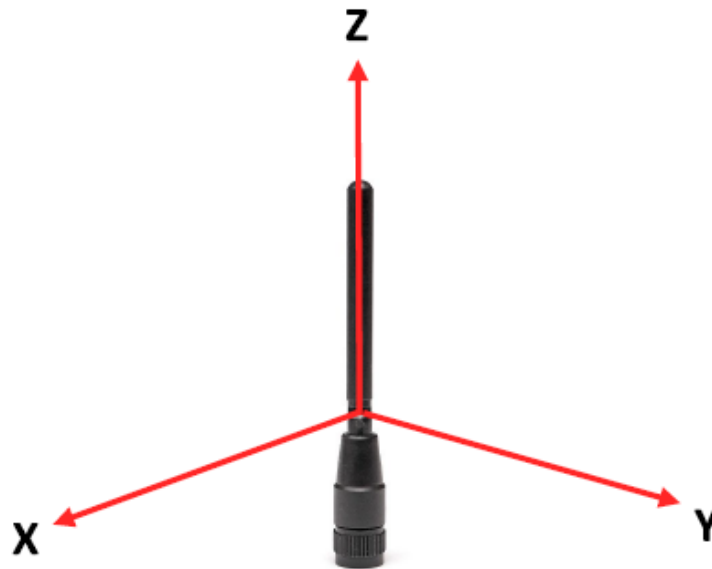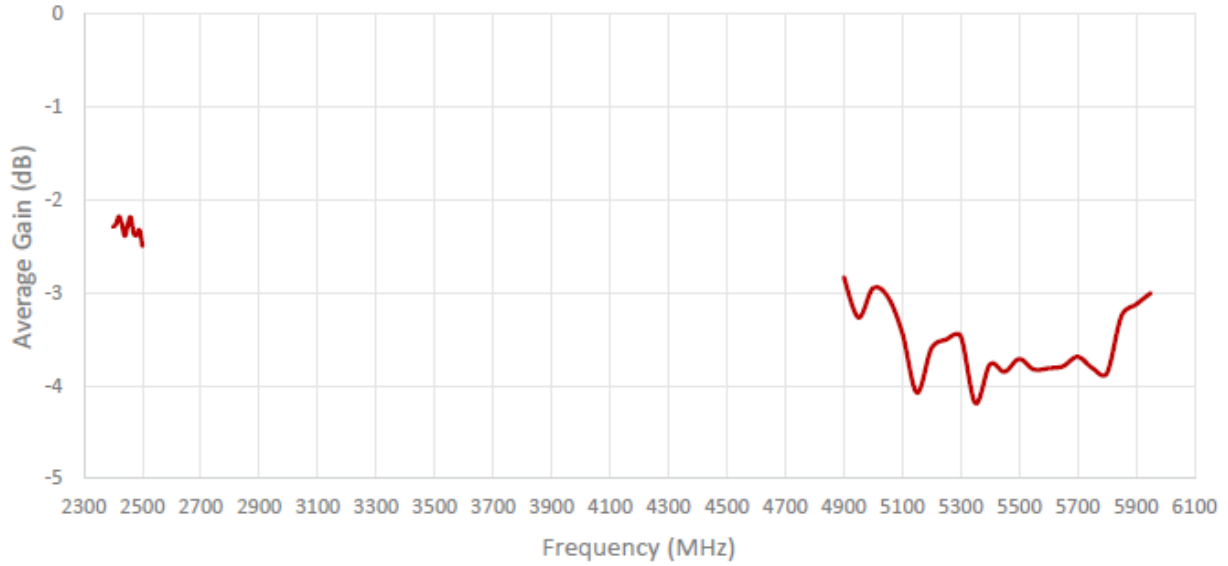

Radiation pattern reference



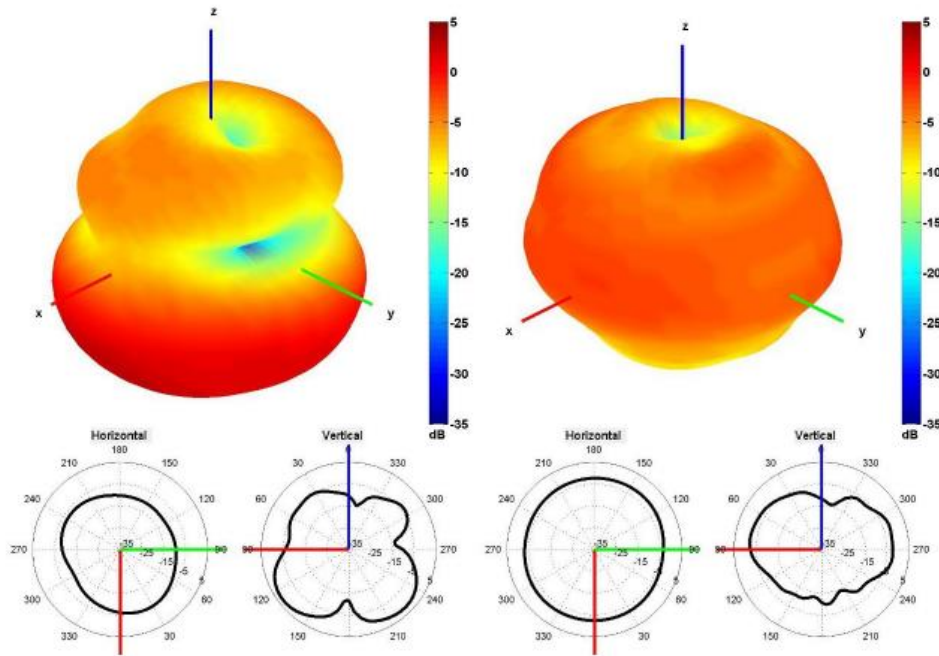

2450 and 5500 MHz Radiation pattern

