

AMC-ANT-2J4H83Pc

4 x 5G NR MIMO adhesive mount antenna

Features

- **Cables 1 - 4: 5G NR**
 - 617 – 960MHz
 - 1427 – 2690MHz
 - 3300 – 5000MHz
 - 5150 – 5925MHz
- Adhesive mount
- High performance
- Low profile
- Ground plane independent
- Certificates: IP67, IP69
- Dimensions: 198 x 127 x 15.7mm
- Customizable cables and connectors



1. Antenna and electrical specifications

Cable 1

Parameters	5G NR Antenna			
Technologies	5G, 4G, 3G, 2G			
Standards	5G NR/4G LTE/FirstNet/CBRS/LPWA/CAT-X/Cat-Mx/CAT-NBx/NB-IoT/3G/2G			
Frequency (MHz)	617 - 960	1427 - 2690	3300 -5000	5150 - 5925
Band (MHz)	600, 700, 850, 900	1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600	3300, 3500, 3600, 3700, 4500	5200, 5500, 5800
5G NR Bands	n5, n8, n12, n20, n28, n71, n81, n83	n1, n2, n3, n7,n25, n34, n38, n40, n41, n50, n51, n66, n70, n74, n75, n76, n80, n84, n86	n77,n78, n79	
4G LTE Bands	B5, B6, B8, B12, B13, B14, B17, B18, B19, B20, B26, B27, B28, B29, B44, B67, B68, B71, B85	B1, B2, B3, B4, B7, B9, B10, B11, B21, B23, B24, B25, B30, B32, B33, B34, B35, B36, B37, B38, B39, B40, B41, B45, B50, B51, B65, B66, B69, B70, B74, B75, B76	B22, B42, 43, B48, B49, B52	B46, B47, B252, B255
3G CELL Bands	B5, B6, B8, B12, B13, B14, B19, B20, B26	B1, B2, B3, B4, B7, B9, B10, B11, B21, B25, B32, B33, B34, B35, B36, B37, B38, B39, B40	B22	
2G CELL Bands	710, 750, 810T, 850, 900P, 900E, 900R	1800DCS, 1900PCS		
CDMA CELL Bands	BC0, BC2, BC3, BC7, BC9, BC10, BC12, BC18, BC19	BC1, BC4, BC6, BC8, BC13, BC14, BC15, BC16, BC20, BC21		
Return Loss (dB)	~-13.2	~-15.7	~-12.6	~-11.6
VSWR	~1.6:1	~1.6:1	~1.7:1	~1.8:1
Efficiency (%)	~55.2	~46.9	~30.4	~26.3
Peak Gain (dBi)	~3.1	~4.5	~2.0	~0.9
Average Gain (dBi)	~-2.6	~-3.3	~-5.2	~-5.8
Impedance (Ohms)	50			
Polarisation	Linear			
Radiation Pattern	Omni-directional			
Max I/P Power (W)	25			
Connector Type	SMA male standard (other connectors available)			
Cable Length	300cm standard (other lengths available)			
Cable Type	DACAR 302 (other cables available)			

Cable 2

Parameters	5G NR Antenna			
Technologies	5G, 4G, 3G, 2G			
Standards	5G NR/4G LTE/FirstNet/CBRS/LPWA/CAT-X/Cat-Mx/CAT-NBx/NB-IoT/3G/2G			
Frequency (MHz)	617 - 960	1427 - 2690	3300 -5000	5150 - 5925
Band (MHz)	600, 700, 850, 900	1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600	3300, 3500, 3600, 3700, 4500	5200, 5500, 5800
5G NR Bands	n5, n8, n12, n20, n28, n71, n81, n83	n1, n2, n3, n7, n25, n34, n38, n40, n41, n50, n51, n66, n70, n74, n75, n76, n80, n84, n86	n77, n78, n79	
4G LTE Bands	B5, B6, B8, B12, B13, B14, B17, B18, B19, B20, B26, B27, B28, B29, B44, B67, B68, B71, B85	B1, B2, B3, B4, B7, B9, B10, B11, B21, B23, B24, B25, B30, B32, B33, B34, B35, B36, B37, B38, B39, B40, B41, B45, B50, B51, B65, B66, B69, B70, B74, B75, B76	B22, B42, 43, B48, B49, B52	B46, B47, B252, B255
3G CELL Bands	B5, B6, B8, B12, B13, B14, B19, B20, B26	B1, B2, B3, B4, B7, B9, B10, B11, B21, B25, B32, B33, B34, B35, B36, B37, B38, B39, B40	B22	
2G CELL Bands	710, 750, 810T, 850, 900P, 900E, 900R	1800DCS, 1900PCS		
CDMA CELL Bands	BC0, BC2, BC3, BC7, BC9, BC10, BC12, BC18, BC19	BC1, BC4, BC6, BC8, BC13, BC14, BC15, BC16, BC20, BC21		
Return Loss (dB)	~-14.6	~-15.4	~-15.6	~-15.7
VSWR	~1.5:1	~1.5:1	~1.5:1	~1.4:1
Efficiency (%)	~55.1	~46.9	~35.5	~34.0
Peak Gain (dBi)	~3.3	~4.1	~3.2	~2.9
Average Gain (dBi)	~-2.6	~-3.3	~-4.6	~-4.7
Impedance (Ohms)	50			
Polarisation	Linear			
Radiation Pattern	Omni-directional			
Max I/P Power (W)	25			
Connector Type	SMA male standard (other connectors available)			
Cable Length	3 metres standard (other lengths available)			
Cable Type	DACAR 302 (other cables available)			

Cable 3

Parameters	5G NR Antenna			
Technologies	5G, 4G, 3G, 2G			
Standards	5G NR/4G LTE/FirstNet/CBRS/LPWA/CAT-X/Cat-Mx/CAT-NBx/NB-IoT/3G/2G			
Frequency (MHz)	617 - 960	1427 - 2690	3300 -5000	5150 - 5925
Band (MHz)	600, 700, 850, 900	1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600	3300, 3500, 3600, 3700, 4500	5200, 5500, 5800
5G NR Bands	n5, n8, n12, n20, n28, n71, n81, n83	n1, n2, n3, n7, n25, n34, n38, n40, n41, n50, n51, n66, n70, n74, n75, n76, n80, n84, n86	n77, n78, n79	
4G LTE Bands	B5, B6, B8, B12, B13, B14, B17, B18, B19, B20, B26, B27, B28, B29, B44, B67, B68, B71, B85	B1, B2, B3, B4, B7, B9, B10, B11, B21, B23, B24, B25, B30, B32, B33, B34, B35, B36, B37, B38, B39, B40, B41, B45, B50, B51, B65, B66, B69, B70, B74, B75, B76	B22, B42, 43, B48, B49, B52	B46, B47, B252, B255
3G CELL Bands	B5, B6, B8, B12, B13, B14, B19, B20, B26	B1, B2, B3, B4, B7, B9, B10, B11, B21, B25, B32, B33, B34, B35, B36, B37, B38, B39, B40	B22	
2G CELL Bands	710, 750, 810T, 850, 900P, 900E, 900R	1800DCS, 1900PCS		
CDMA CELL Bands	BC0, BC2, BC3, BC7, BC9, BC10, BC12, BC18, BC19	BC1, BC4, BC6, BC8, BC13, BC14, BC15, BC16, BC20, BC21		
Return Loss (dB)	~-15.4	~-14.3	~-13.7	~-13.0
VSWR	~1.5:1	~1.6:1	~1.7:1	~1.7:1
Efficiency (%)	~55.3	~44.0	~29.7	~27.5
Peak Gain (dBi)	~3.5	~3.4	~2.6	~3.1
Average Gain (dBi)	~-2.6	~-3.6	~-5.4	~-5.6
Impedance (Ohms)	50			
Polarisation	Linear			
Radiation Pattern	Omni-directional			
Max I/P Power (W)	25			
Connector Type	SMA male standard (other connectors available)			
Cable Length	3 metres standard (other lengths available)			
Cable Type	DACAR 302 (other cables available)			

Cable 4

Parameters	5G NR Antenna			
Technologies	5G, 4G, 3G, 2G			
Standards	5G NR/4G LTE/FirstNet/CBRS/LPWA/CAT-X/Cat-Mx/CAT-NBx/NB-IoT/3G/2G			
Frequency (MHz)	617 - 960	1427 - 2690	3300 -5000	5150 - 5925
Band (MHz)	600, 700, 850, 900	1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600	3300, 3500, 3600, 3700, 4500	5200, 5500, 5800
5G NR Bands	n5, n8, n12, n20, n28, n71, n81, n83	n1, n2, n3, n7, n25, n34, n38, n40, n41, n50, n51, n66, n70, n74, n75, n76, n80, n84, n86	n77, n78, n79	
4G LTE Bands	B5, B6, B8, B12, B13, B14, B17, B18, B19, B20, B26, B27, B28, B29, B44, B67, B68, B71, B85	B1, B2, B3, B4, B7, B9, B10, B11, B21, B23, B24, B25, B30, B32, B33, B34, B35, B36, B37, B38, B39, B40, B41, B45, B50, B51, B65, B66, B69, B70, B74, B75, B76	B22, B42, 43, B48, B49, B52	B46, B47, B252, B255
3G CELL Bands	B5, B6, B8, B12, B13, B14, B19, B20, B26	B1, B2, B3, B4, B7, B9, B10, B11, B21, B25, B32, B33, B34, B35, B36, B37, B38, B39, B40	B22	
2G CELL Bands	710, 750, 810T, 850, 900P, 900E, 900R	1800DCS, 1900PCS		
CDMA CELL Bands	BC0, BC2, BC3, BC7, BC9, BC10, BC12, BC18, BC19	BC1, BC4, BC6, BC8, BC13, BC14, BC15, BC16, BC20, BC21		
Return Loss (dB)	~-15.2	~-16.8	~-13.9	~-12.5
VSWR	~1.5:1	~1.4:1	~1.6:1	~1.7:1
Efficiency (%)	~57.1	~48.4	~30.4	~25.1
Peak Gain (dBi)	~3.4	~4.5	~2.5	~1.2
Average Gain (dBi)	~-2.4	~-3.2	~-5.4	~-6.2
Impedance (Ohms)	50			
Polarisation	Linear			
Radiation Pattern	Omni-directional			
Max I/P Power (W)	25			
Connector Type	SMA male standard (other connectors available)			
Cable Length	3 metres standard (other lengths available)			
Cable Type	DACAR 302 (other cables available)			


Measurement conditions:

- Mounted on 30 x 30 x 0.25cm plastic plate
- 100cm of DACAR 302 cable
- Measured in certified CTIA 3D Anechoic chamber

2. Mechanical and environmental specifications



Mounting Type	Adhesive mount
Dimensions (mm)	198 x 127 x 15.7
Radome	ASA
Radome Colour	Black
Operating Temperature (°C)	-40 to +85
Storage Temperature (°C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IP69, CE




3. Antenna drawings

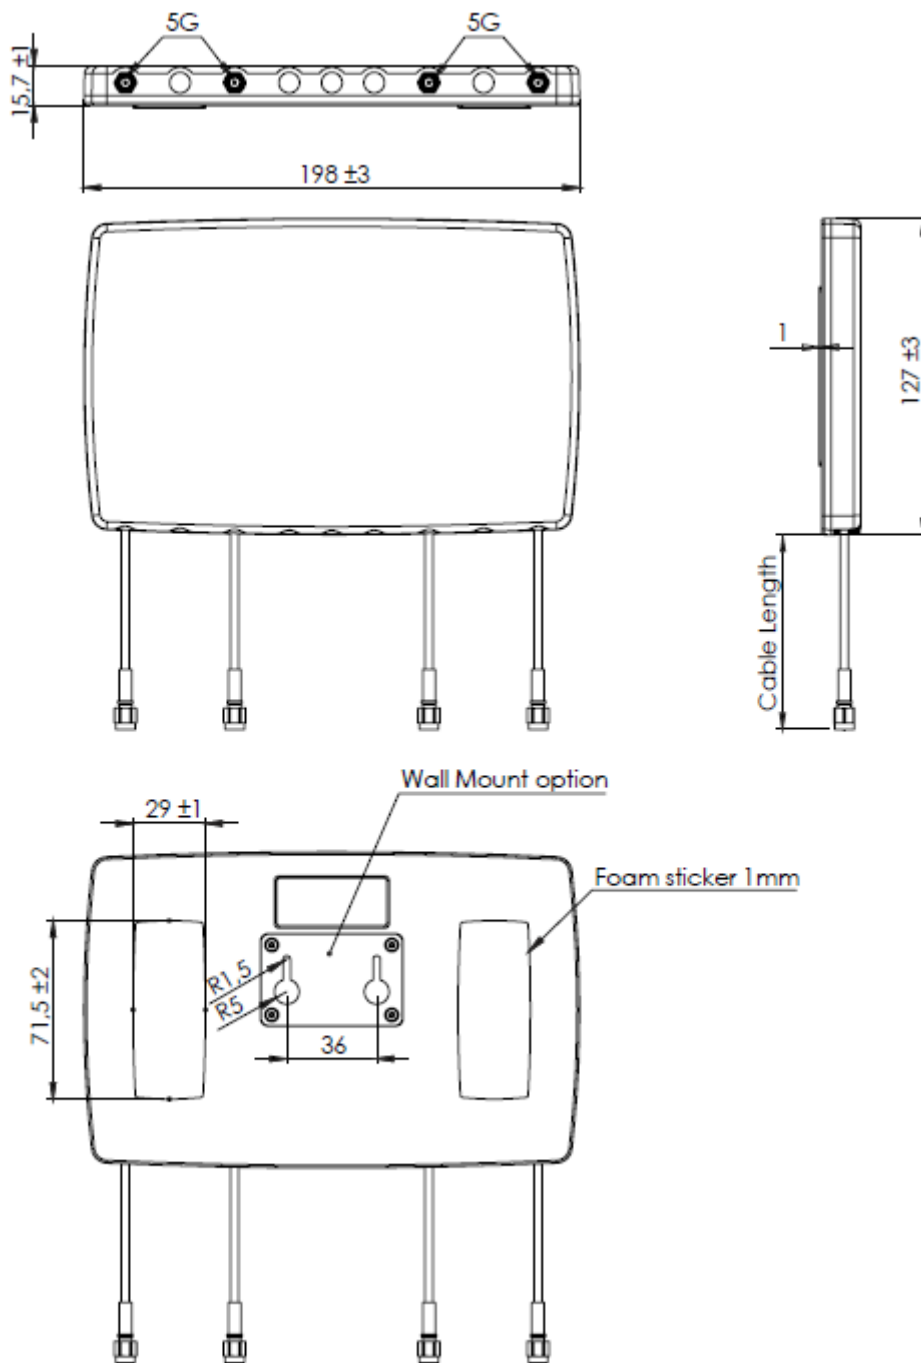



4. Antenna parameters




Cable 1: 5GNR

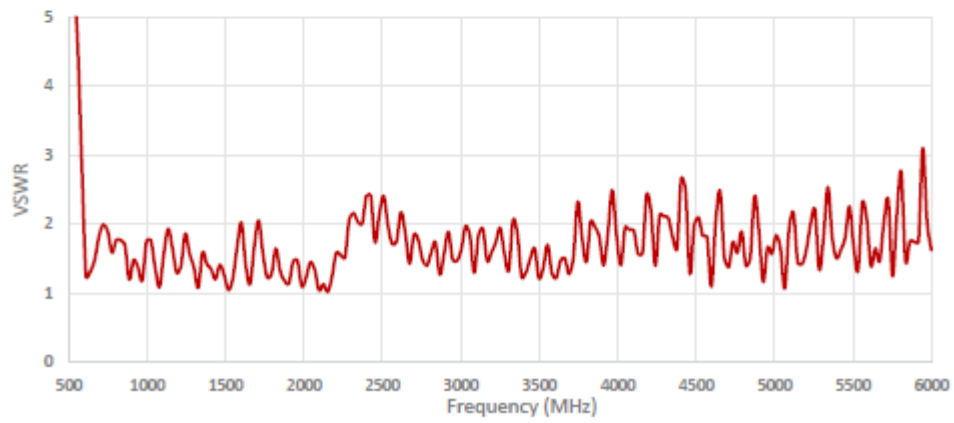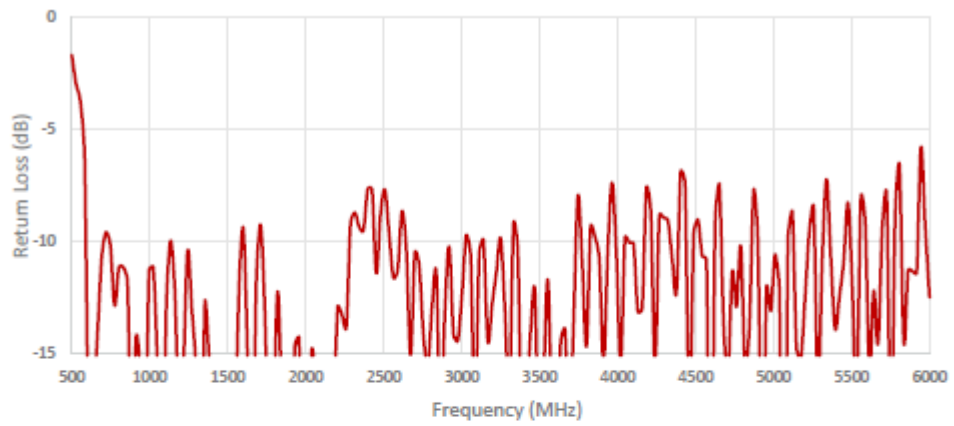

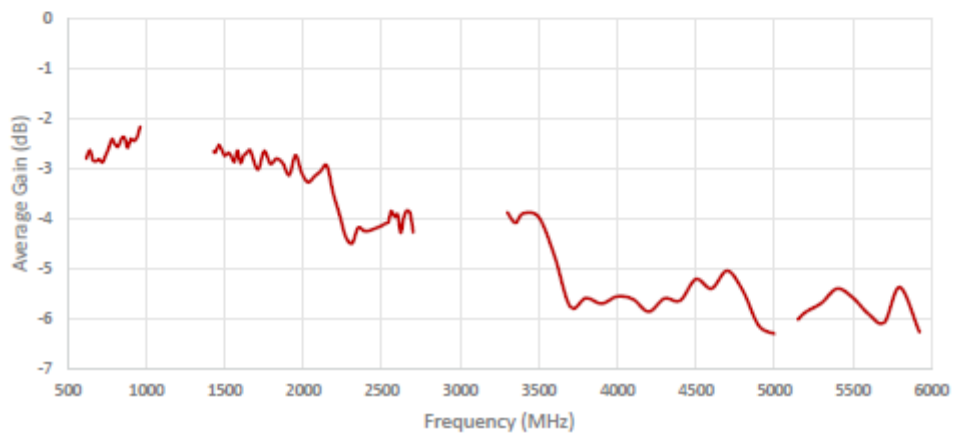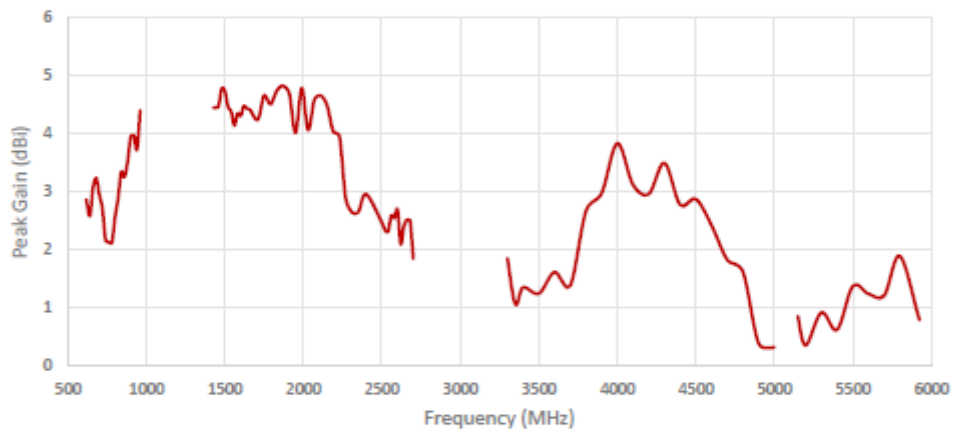
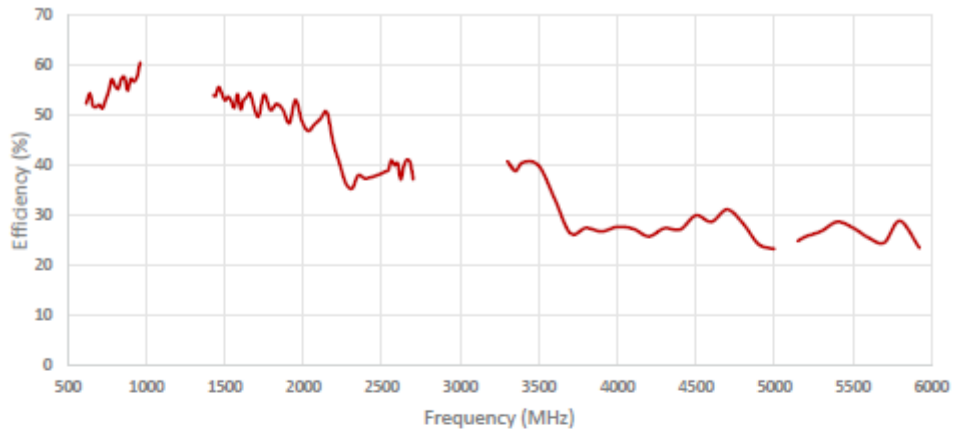





Cable 2: 5GNR

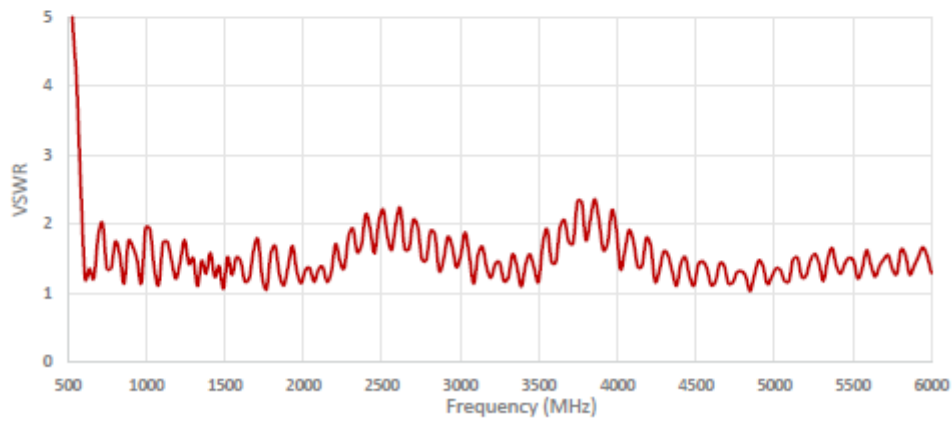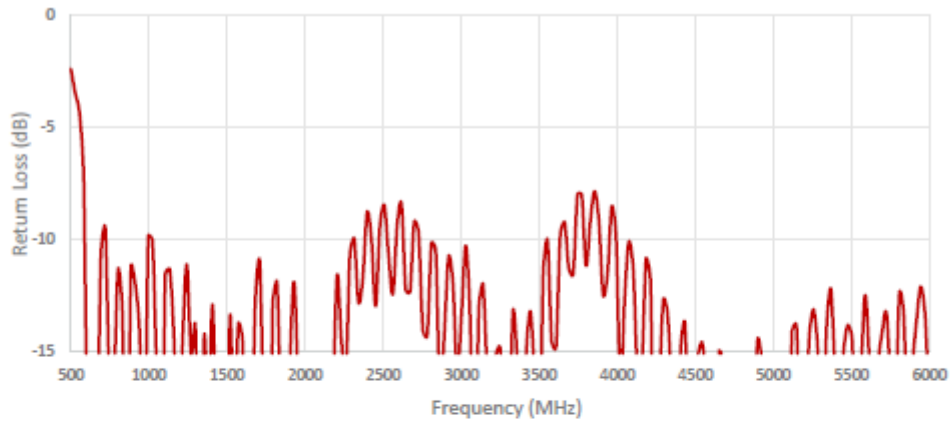

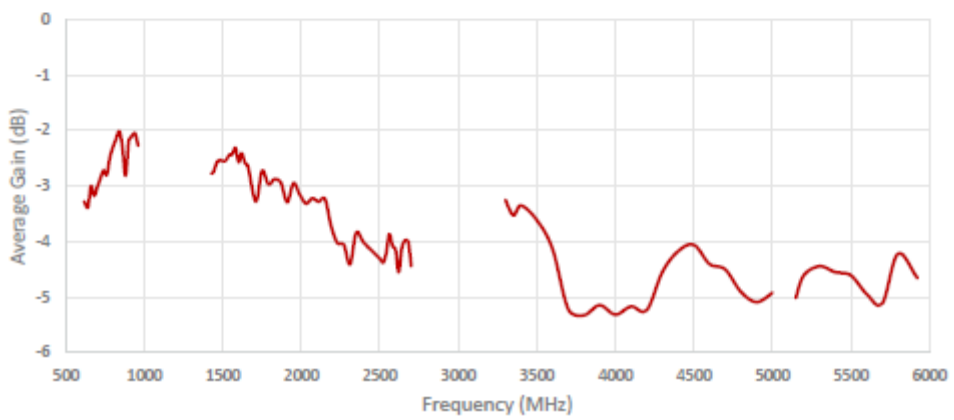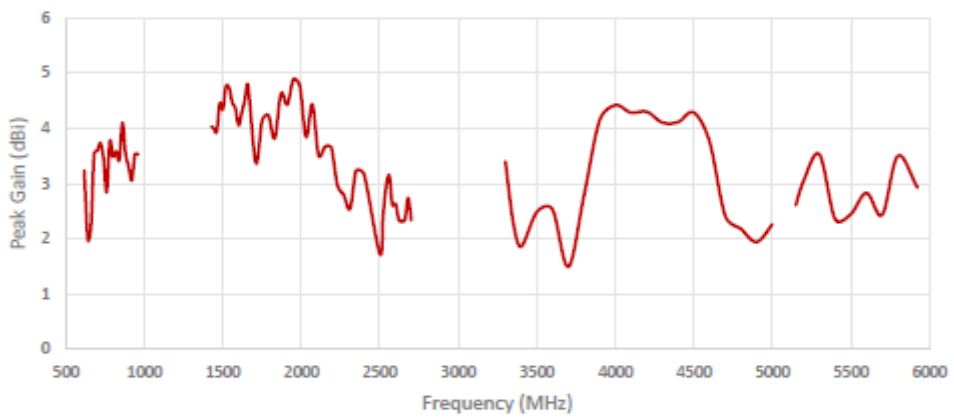
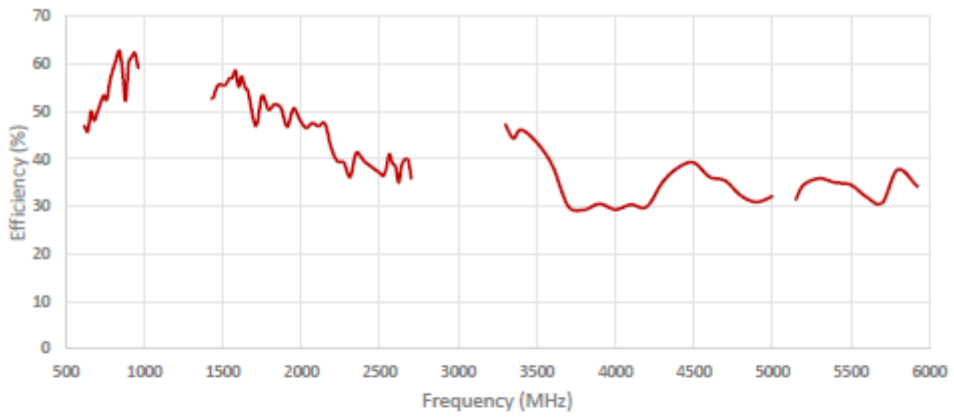





Cable 3: 5GNR

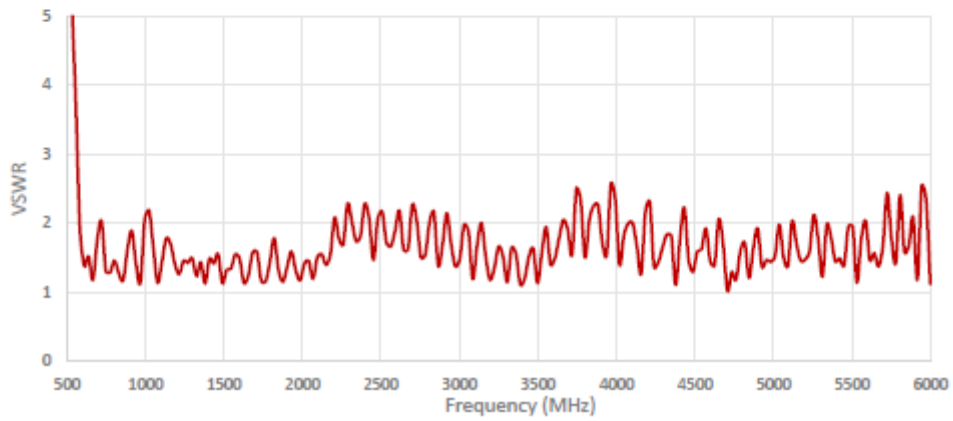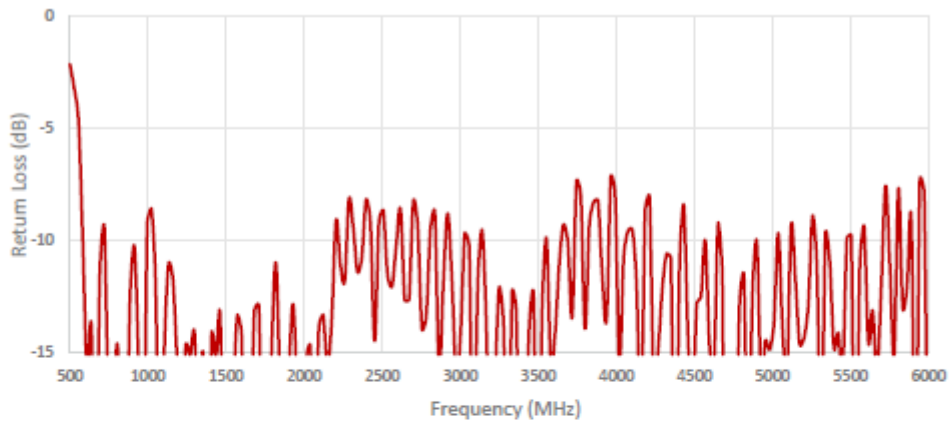

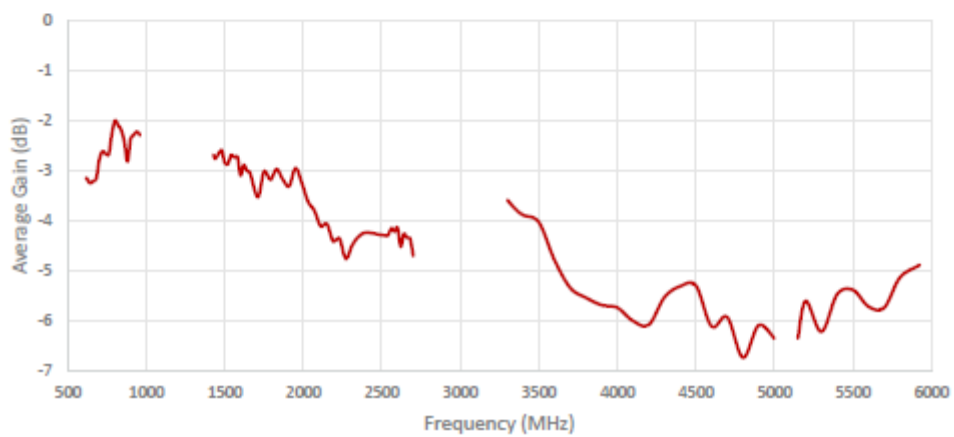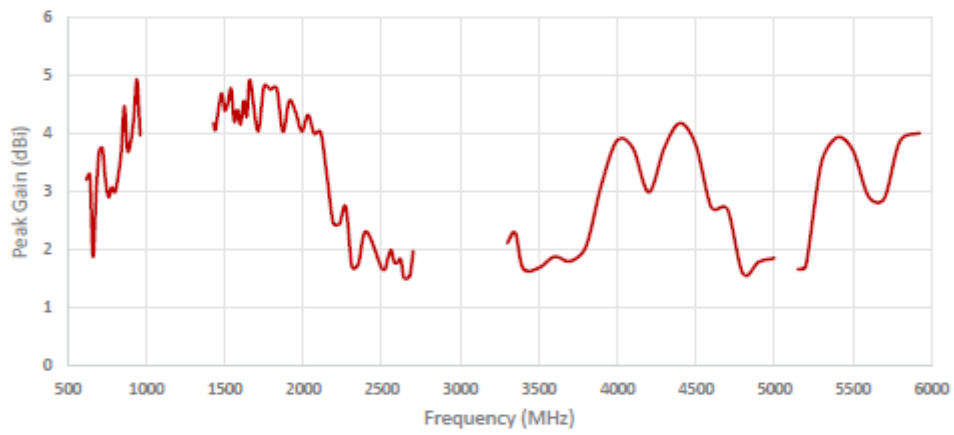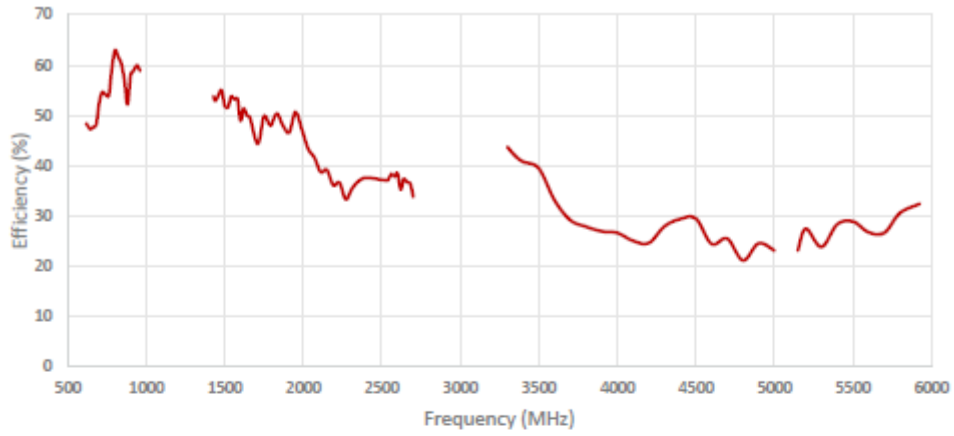


Cable 4: 5GNR

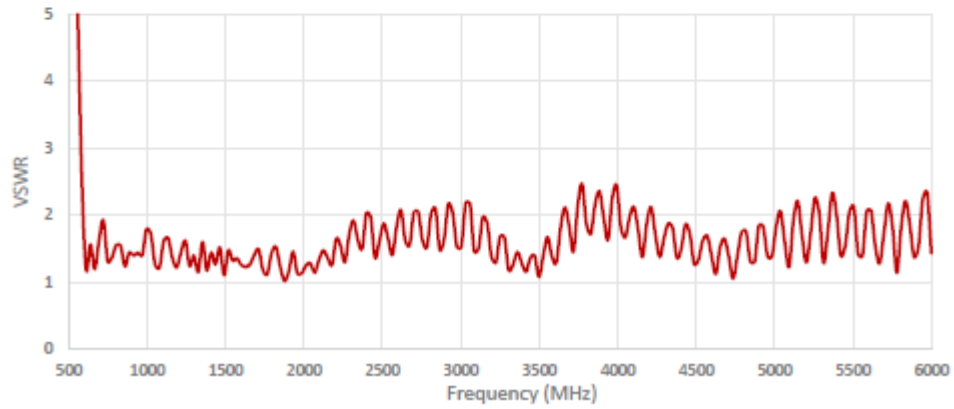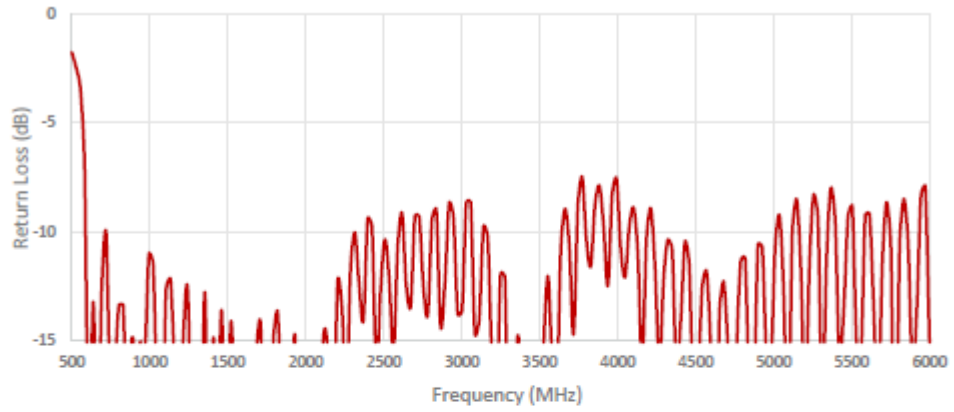


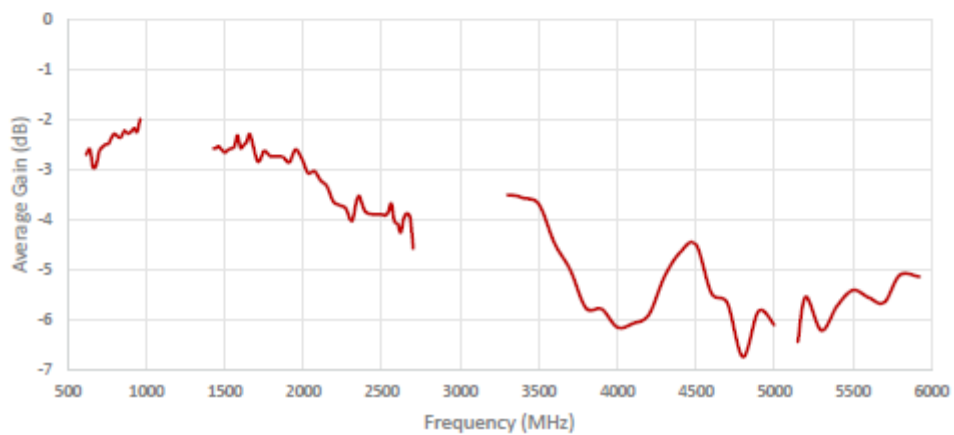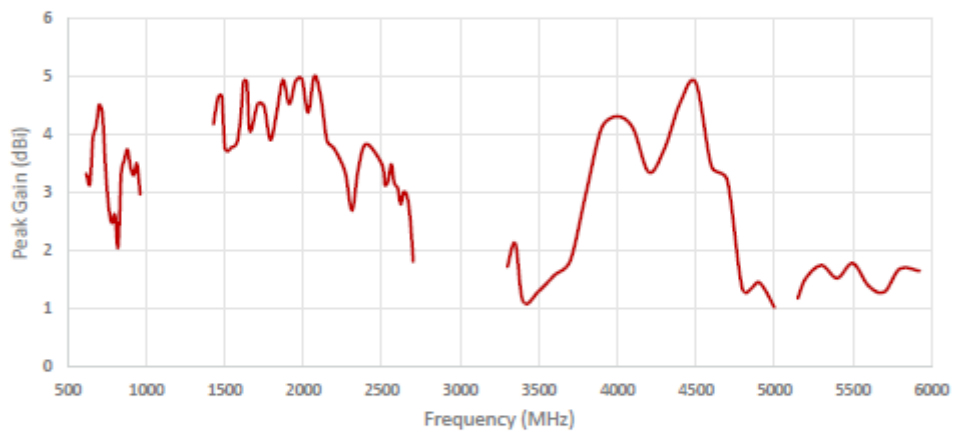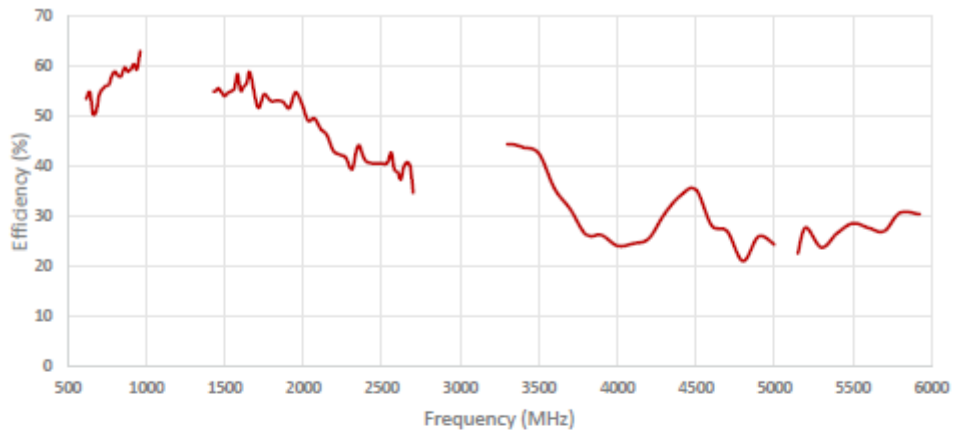


ISOLATION FOR CABLES 1 AND 2

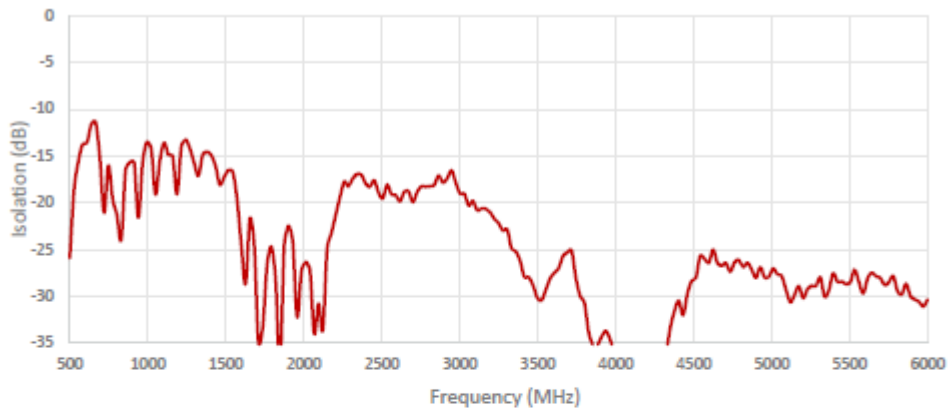


ENVELOPE CORRELATION COEFFICIENT FOR CABLES 1 AND 2

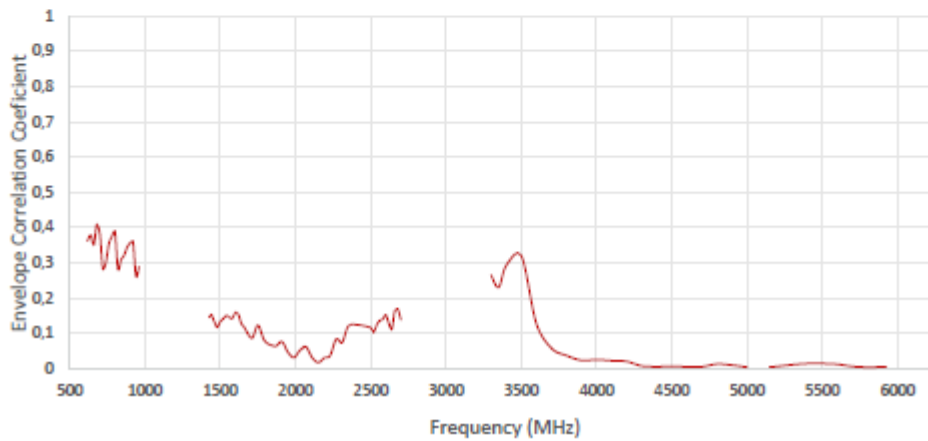


ISOLATION FOR CABLES 1 AND 3

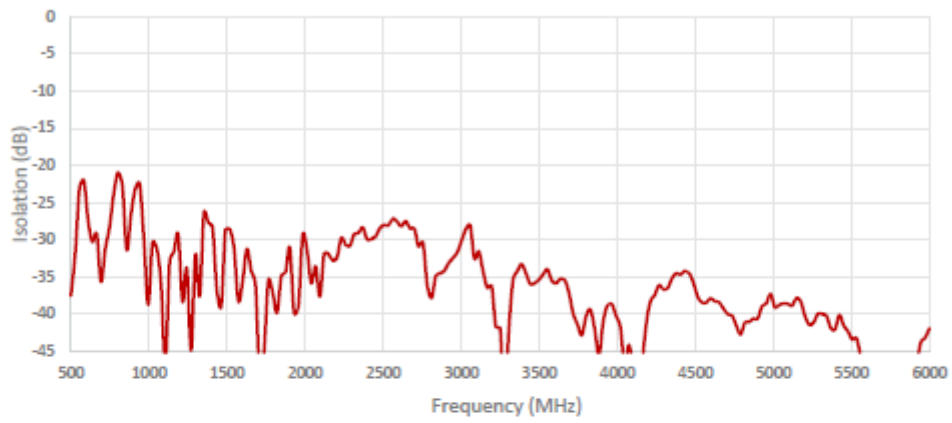


ENVELOPE CORRELATION COEFFICIENT FOR CABLES 1 AND 3

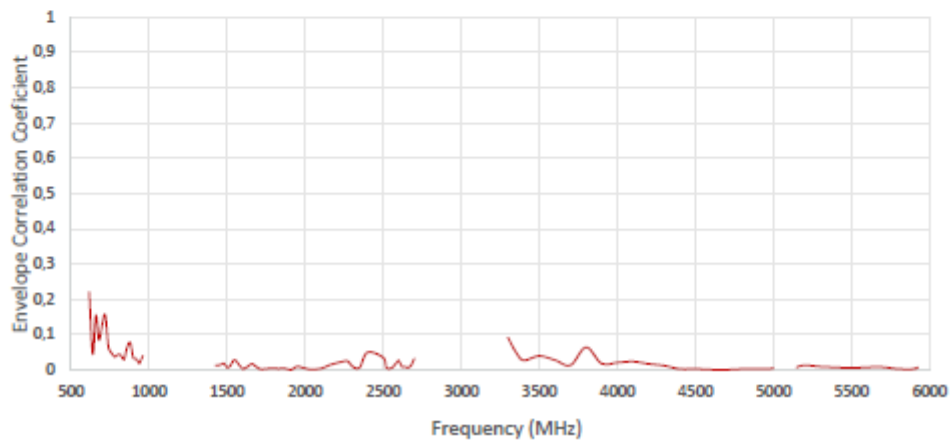


ISOLATION FOR CABLES 1 AND 4

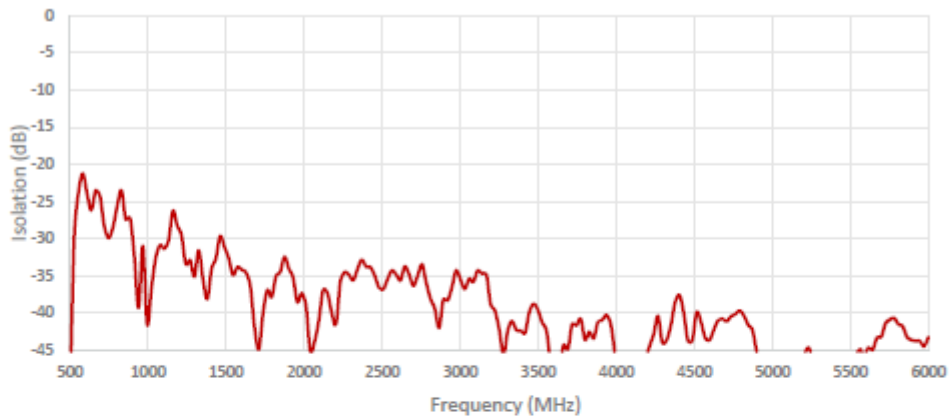


ENVELOPE CORRELATION COEFFICIENT FOR CABLES 1 AND 4

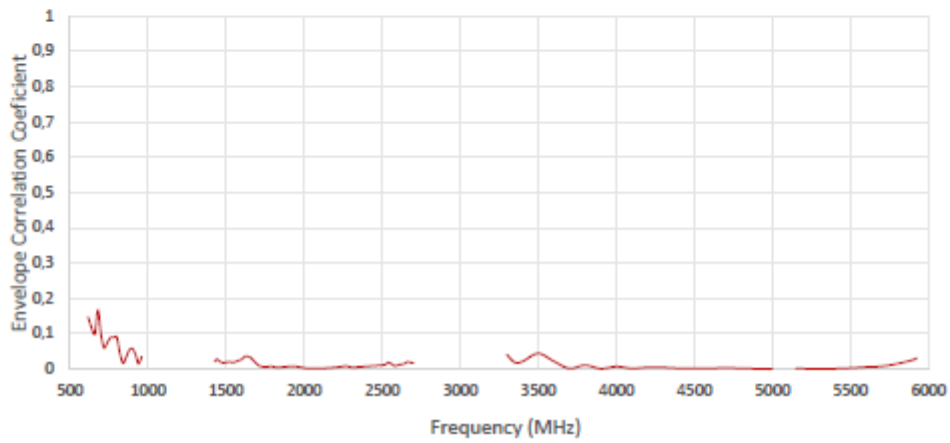


ISOLATION FOR CABLES 2 AND 3

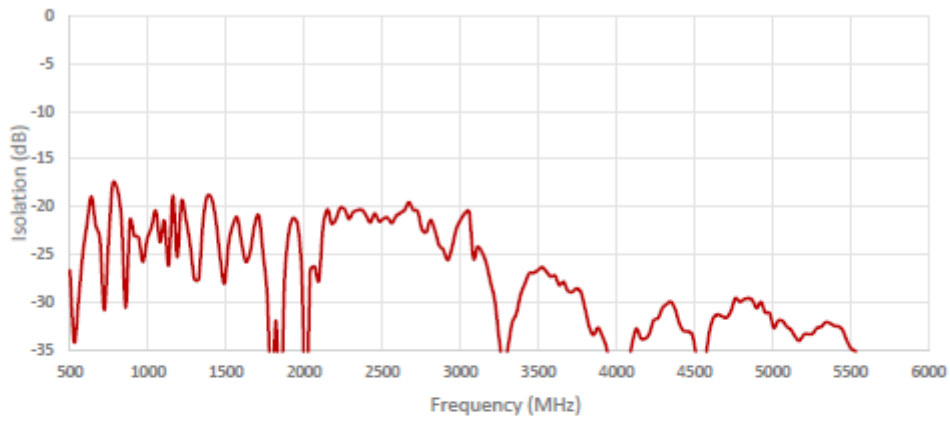


ENVELOPE CORRELATION COEFFICIENT FOR CABLES 2 AND 3

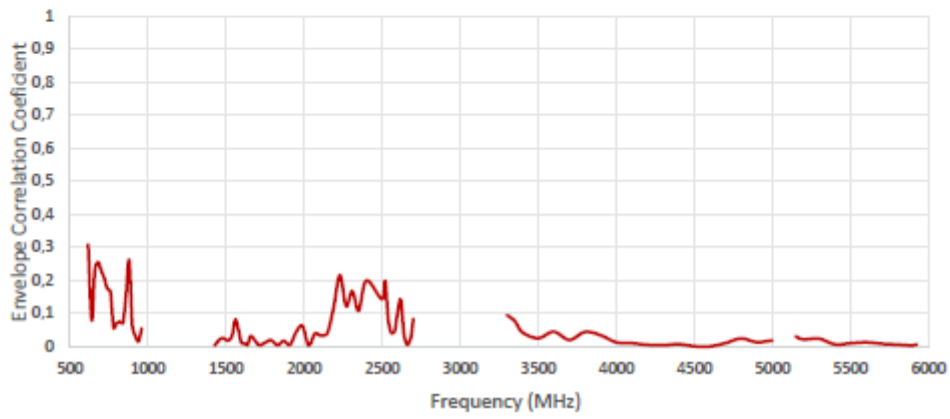

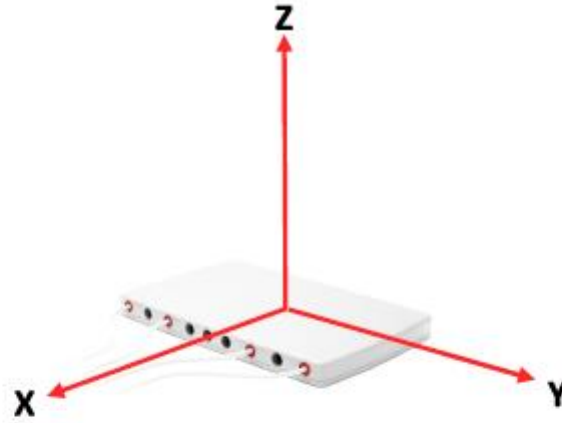


Radiation pattern reference

Table 1: 5GNR

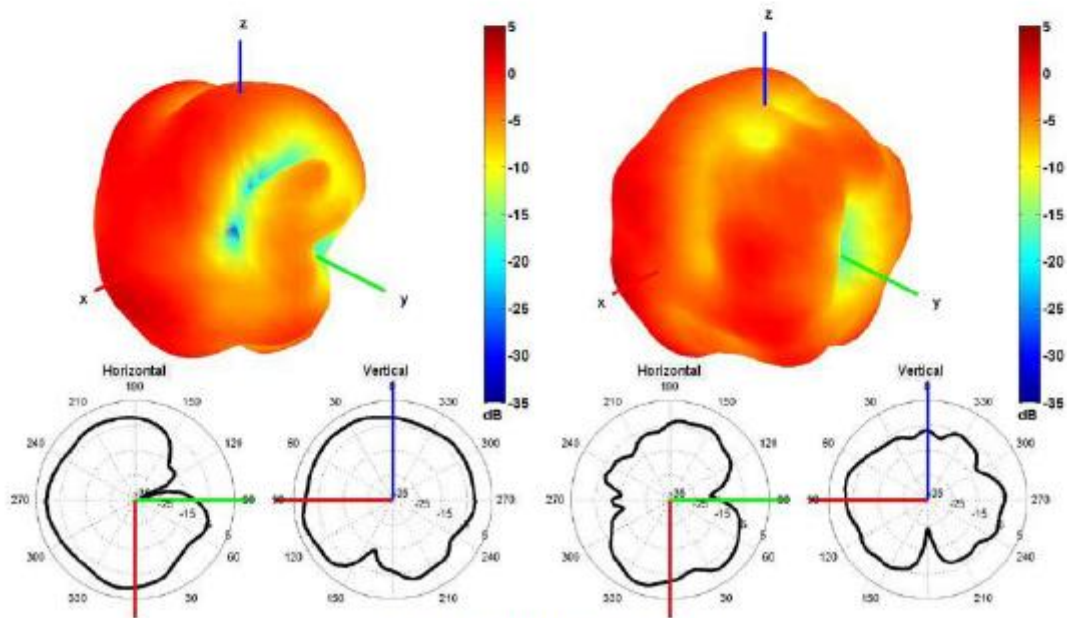


750 and 2500 MHz Radiation pattern

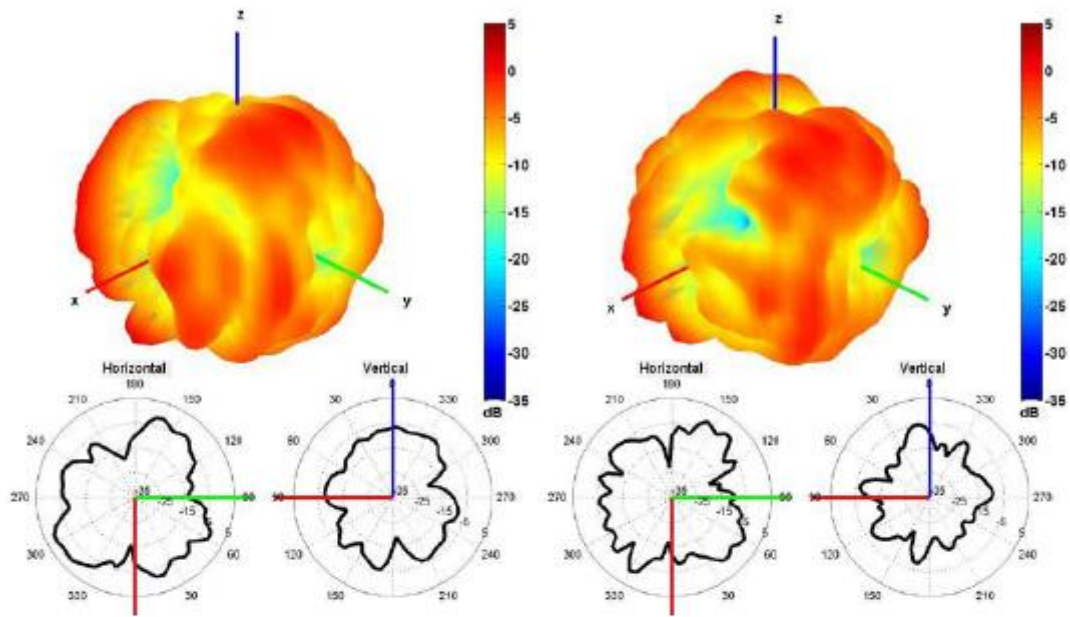

4500 and 5500 MHz Radiation pattern

Cable 2: 5GNR

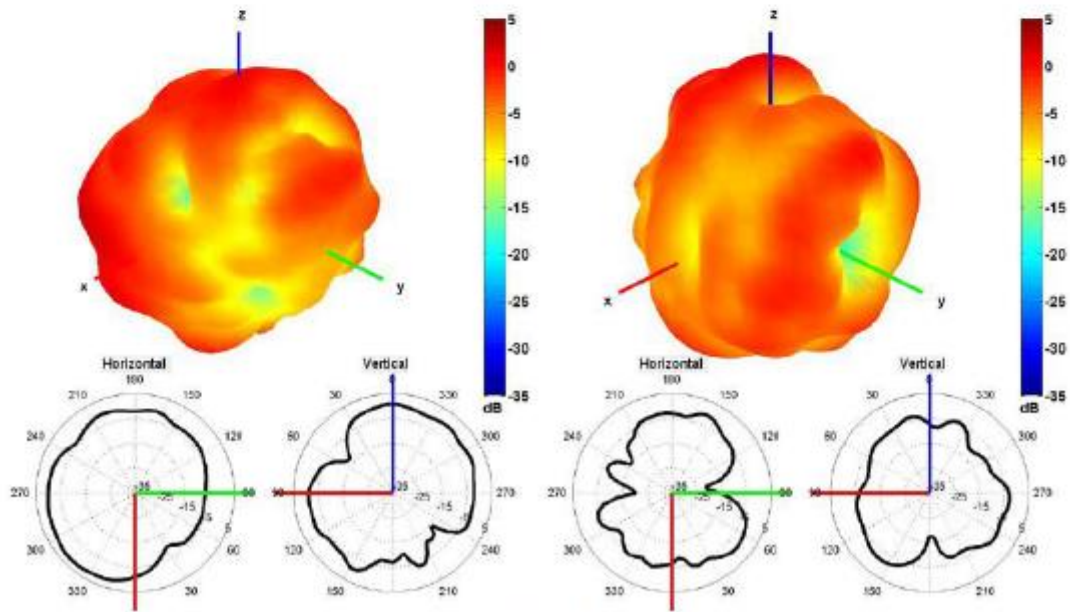

750 and 2500 MHz Radiation pattern



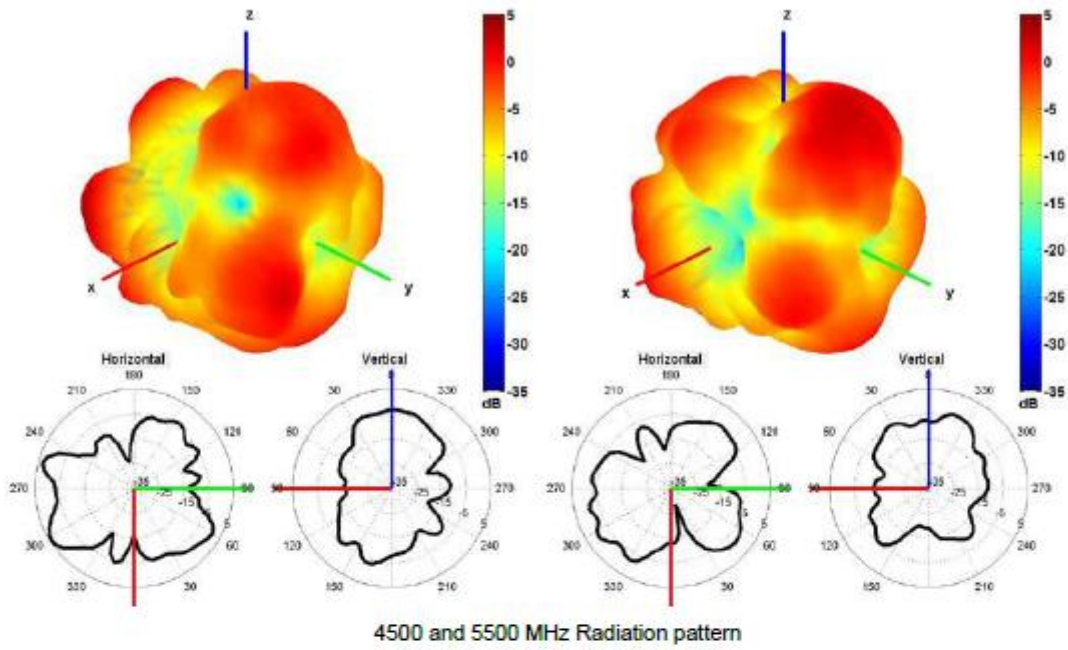



Table 3: 5GNR

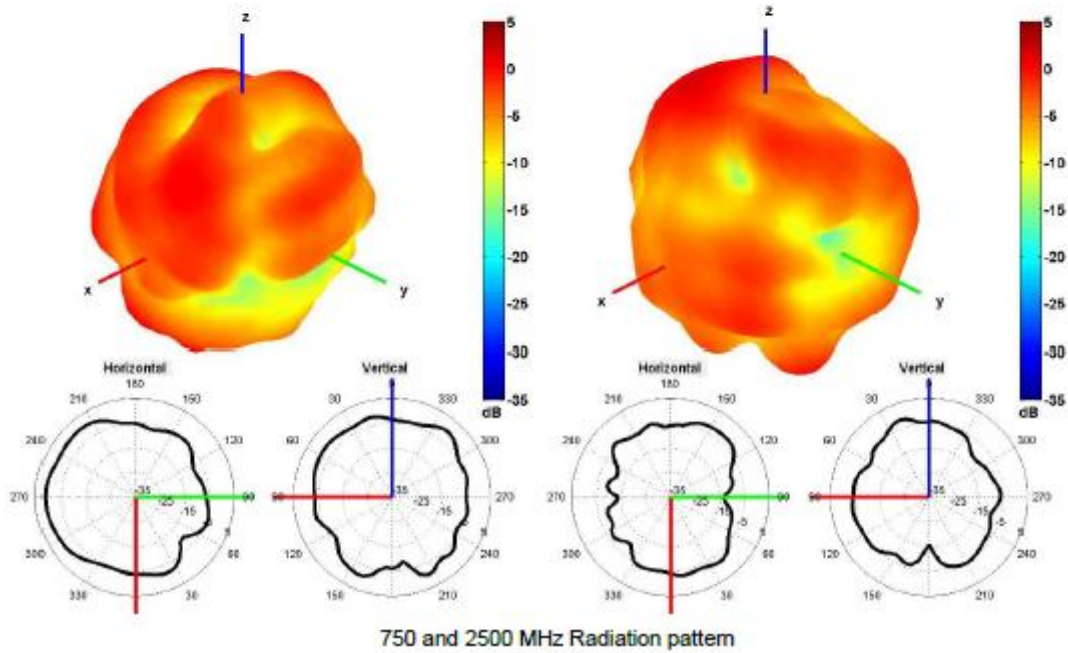

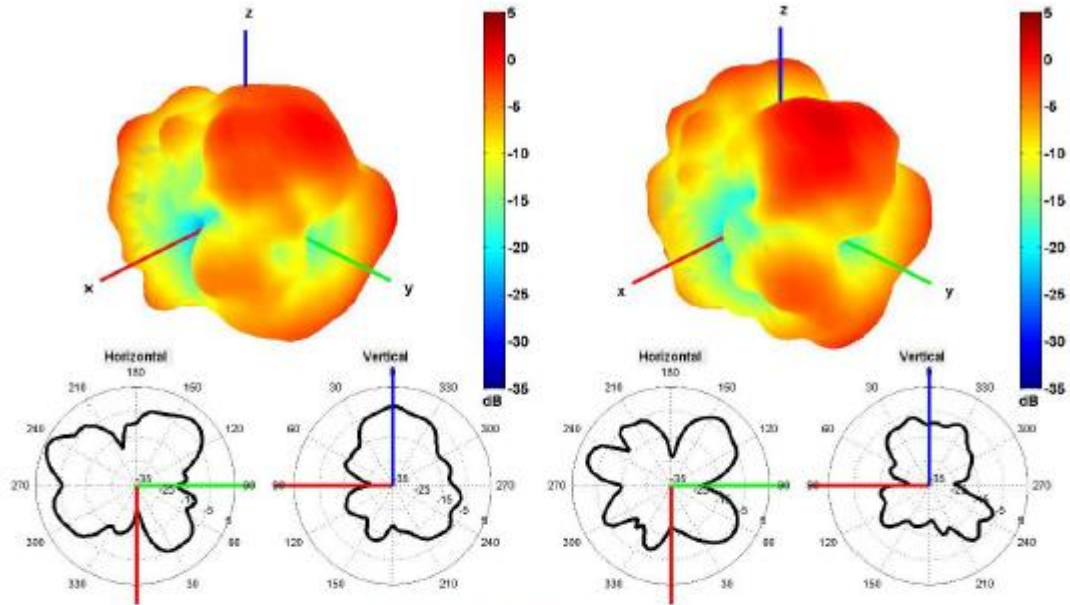

4500 and 5500 MHz Radiation pattern

Table 4: 5GNR

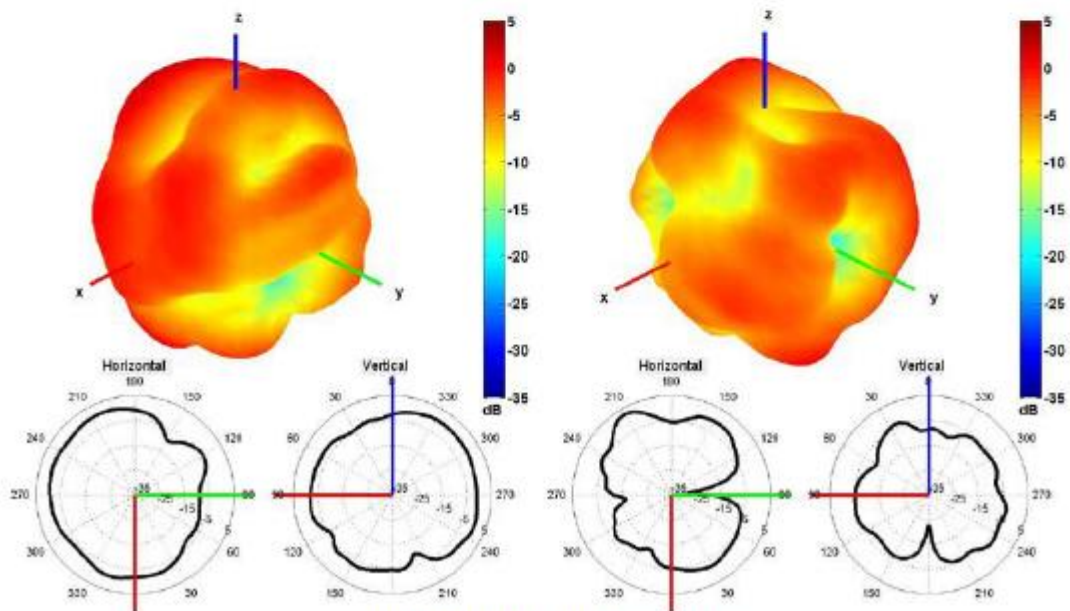

750 and 2500 MHz Radiation pattern

