

AMC-ANT-2JP1502P-SP

2.4/5.0/6.0GHz ISM rigid fibreglass antenna

Features

- 2.4/5.0/6.0GHz ISM
 - 2410 – 2490MHz
 - 4920 – 7125MHz
- Wi-Fi 6E antenna
- High performance
- Ground plane independent
- Self-adhesive
- Dimensions: 30 x 15 x 1mm
- Customisable cable and connector



1. Antenna and electrical specifications

Parameters	2.4/5.0/6.0GHz ISM antenna		
Standards	Wi-Fi 6E, Bluetooth, ZigBee, ISM		
Band (MHz)	2.4GHz	5.0GHz	6.0GHz
Frequency (MHz)	2410 - 2490	4920 - 5925	5925 - 7125
Return Loss (dB)	~-11.3	~-12.4	~-12.7
VSWR	~1.9:1	~1.8:1	~1.7:1
Efficiency (%)	~57.7	~70	~68.3
Peak Gain (dBi)	~3.1	~5.0	~4.5
Average Gain (dB)	~-2.4	~-1.6	~-1.7
Impedance (Ohms)	50		
Polarization	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	10		
Connector Type	U.FL standard (other connectors available)		
Cable Length	100mm standard (other lengths available)		
Cable Type	1.37mm mini coax standard (other cables available)		


Measurement conditions:

- Mounted on 30 x 30 x 0.25cm ABS plate
- 100mm of 1.37mm cable
- Measured in certified CTIA 3D anechoic chamber



2. Mechanical and environmental specifications



Mounting type	Self-adhesive
Dimensions (mm)	30 x 15 x 1
Adhesive Type	3M 467
Material	Rigid fibreglass
Operating Temperature (°C)	-40 to +85
Storage Temperature (°C)	-40 to +85
Substance Compliance	RoHS


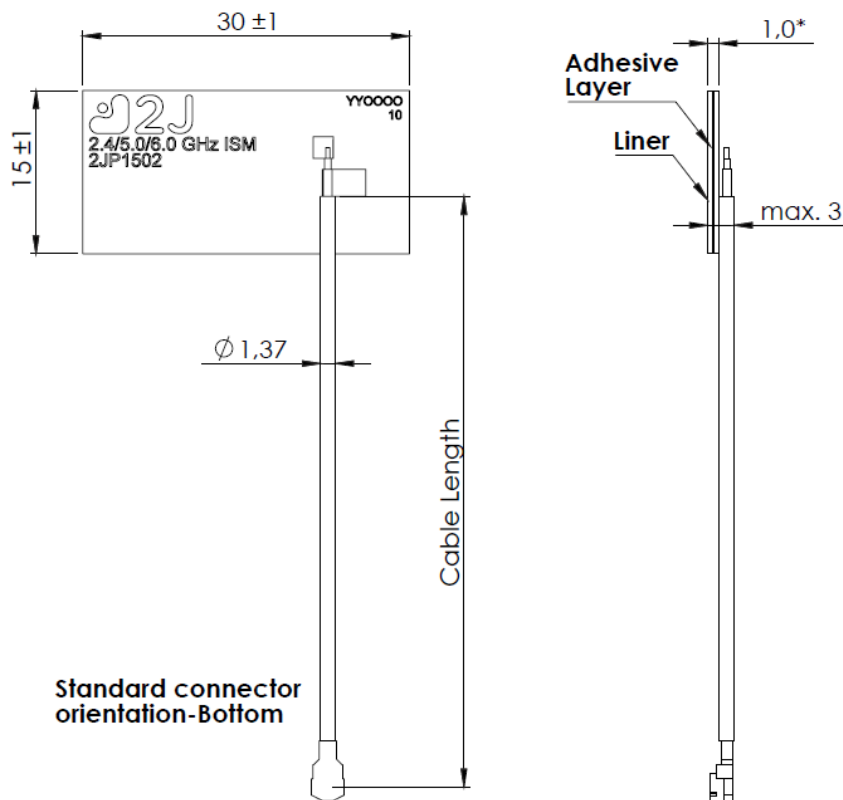




* thickness - PCB and Sticker SP



3. Antenna parameters

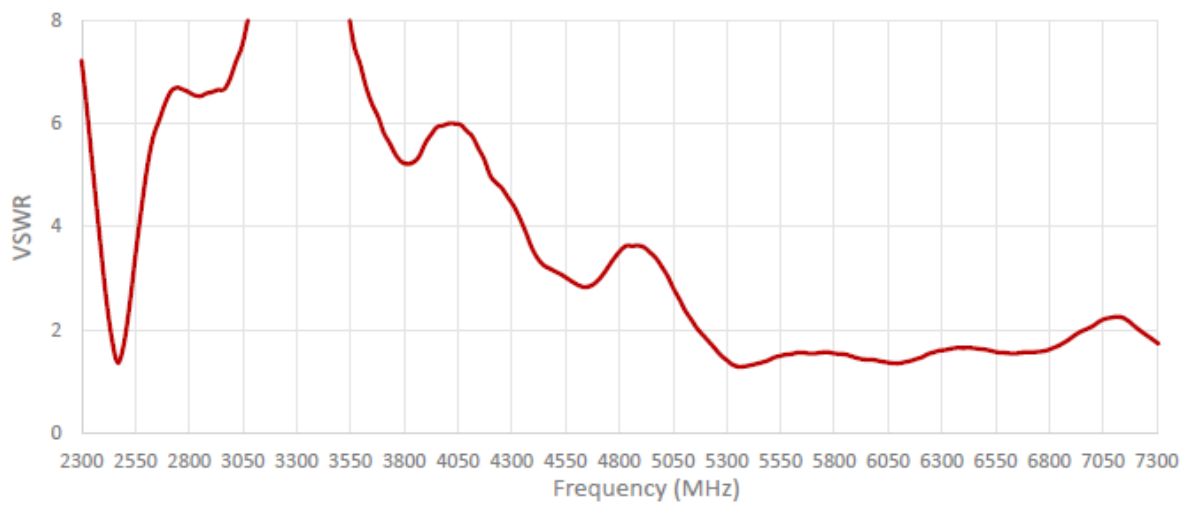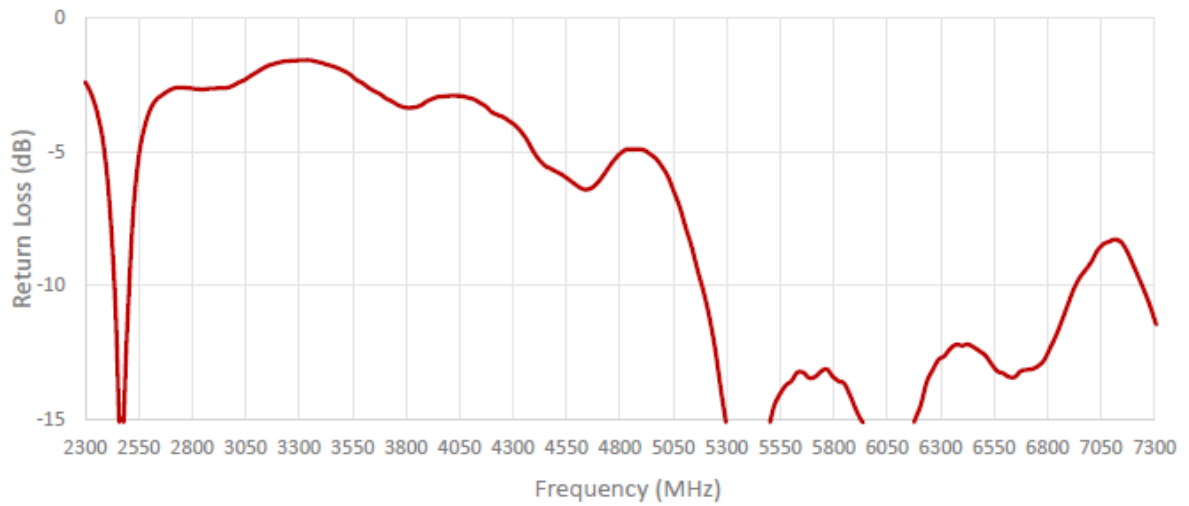


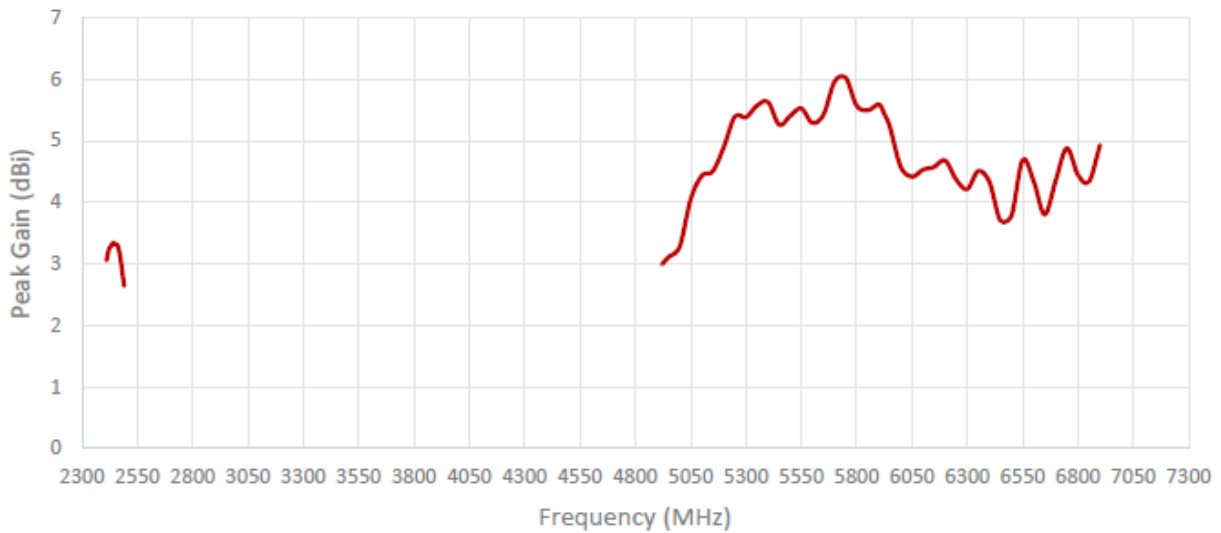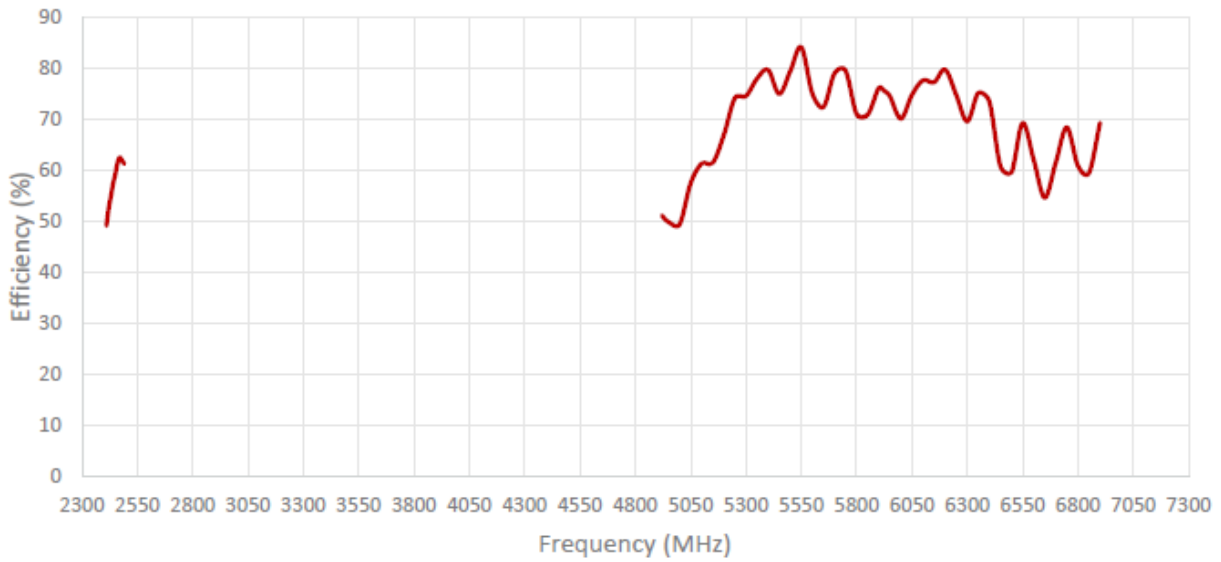

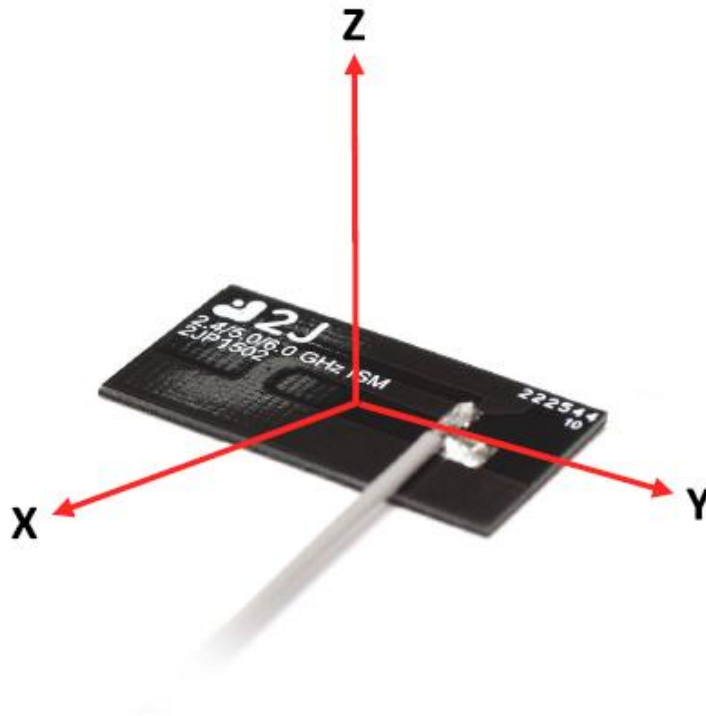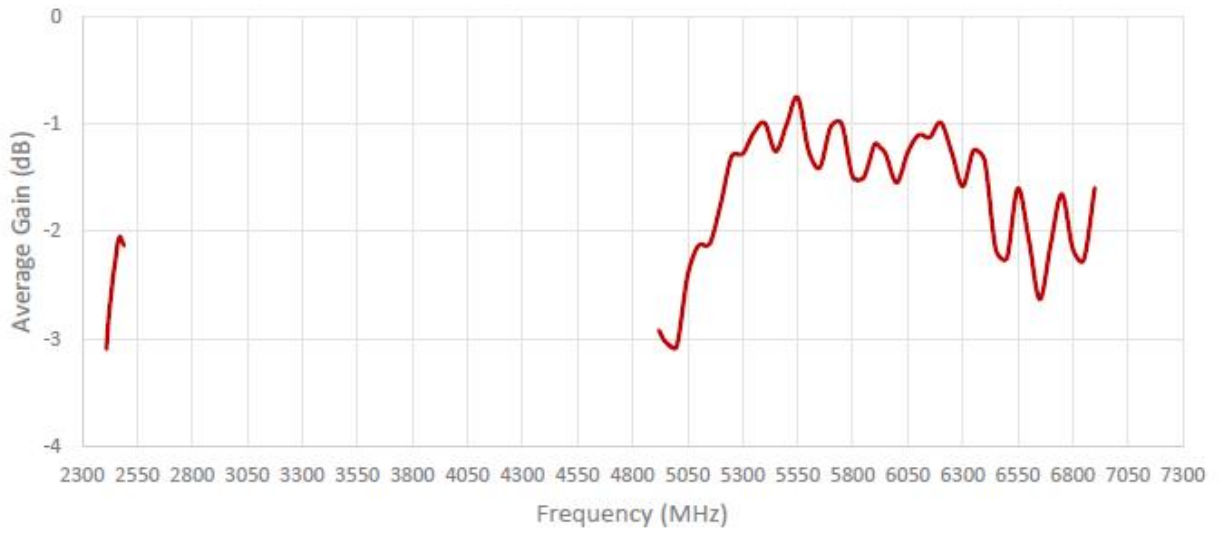


Radiation pattern reference



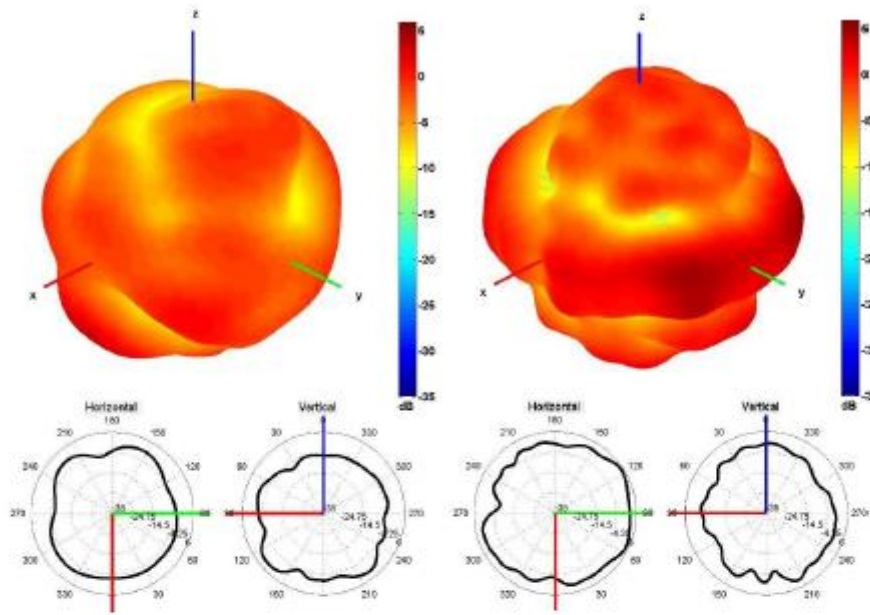

2450 and 5500 MHz Radiation pattern

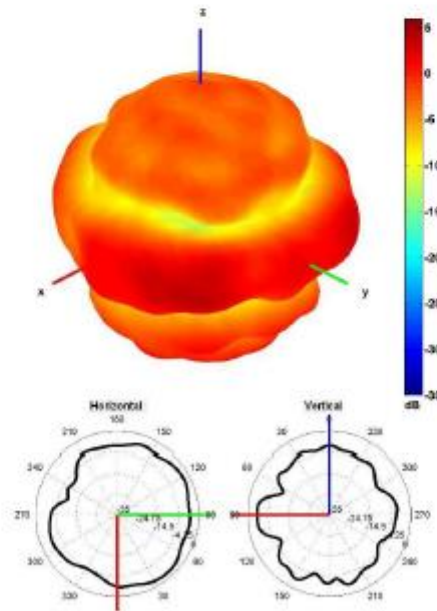

6500 MHz Radiation pattern

