

AMC-ANT-2J6084PGFa

5G NR MIMO and GPS/GLONASS adhesive mount antenna

Features

- **Cables 1 & 2: 5G NR**
 - 617 – 960MHz
 - 1427 – 2690MHz
 - 3300 – 5000MHz
 - 5150 – 5925MHz
- **Cable 3: GPS/GLONASS/QZSS/Galileo**
 - 1575 – 1606MHz
- Adhesive mount
- Ground plane independent
- Dimensions: 80 x 76 x 16mm
- Customisable cables and connectors



1. Antenna and electrical specifications

Cable 1

Parameters	5G NR Antenna			
Technologies	5G, 4G, 3G, 2G			
Standards	5G NR/4G LTE/FirstNet/CBRS/LPWA/CAT-X/Cat-Mx/CAT-NBx/NB-IoT/3G/2G			
Frequency (MHz)	617 - 960	1427 - 2690	3300 -5000	5150 - 5925
Band (MHz)	600, 700, 850, 900	1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600	3300, 3500, 3600, 3700, 4500	5200, 5500, 5800
5G NR Bands	n5, n8, n12, n20, n28, n71, n81, n83	n1, n2, n3, n7, n25, n34, n38, n40, n41, n50, n51, n66, n70, n74, n75, n76, n80, n84, n86	n77, n78, n79	
4G LTE Bands	B5, B6, B8, B12, B13, B14, B17, B18, B19, B20, B26, B27, B28, B29, B44, B67, B68, B71, B85	B1, B2, B3, B4, B7, B9, B10, B11, B21, B23, B24, B25, B30, B32, B33, B34, B35, B36, B37, B38, B39, B40, B41, B45, B50, B51, B65, B66, B69, B70, B74, B75, B76	B22, B42, 43, B48, B49, B52	B46, B47, B252, B255
3G CELL Bands	B5, B6, B8, B12, B13, B14, B19, B20, B26	B1, B2, B3, B4, B7, B9, B10, B11, B21, B25, B32, B33, B34, B35, B36, B37, B38, B39, B40	B22	
2G CELL Bands	710, 750, 810T, 850, 900P, 900E, 900R	1800DCS, 1900PCS		
CDMA CELL Bands	BC0, BC2, BC3, BC7, BC9, BC10, BC12, BC18, BC19	BC1, BC4, BC6, BC8, BC13, BC14, BC15, BC16, BC20, BC21		
Return Loss (dB)	~-6.9	~-13.5	~-9.1	~-7.2
VSWR	~3.4:1	~1.7:1	~2.3:1	~2.6:1
Efficiency (%)	~42.6	~58.8	~37.5	~31.8
Peak Gain (dBi)	~2.4	~4.4	~2.0	~-1.1
Average Gain (dBi)	~-3.9	~-2.3	~-4.3	~-5.0
Impedance (Ohms)	50			
Polarisation	Linear			
Radiation Pattern	Omni-directional			
Max I/P Power (W)	25			
Connector Type	SMA male standard (other connectors available)			
Cable Length	300cm standard (other lengths available)			
Cable Type	DACAR 302 (other cables available)			

Cable 2

Parameters	5G NR Antenna			
Technologies	5G, 4G, 3G, 2G			
Standards	5G NR/4G LTE/FirstNet/CBRS/LPWA/CAT-X/Cat-Mx/CAT-NBx/NB-IoT/3G/2G			
Frequency (MHz)	617 - 960	1427 - 2690	3300 -5000	5150 - 5925
Band (MHz)	600, 700, 850, 900	1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600	3300, 3500, 3600, 3700, 4500	5200, 5500, 5800
5G NR Bands	n5, n8, n12, n20, n28, n71, n81, n83	n1, n2, n3, n7,n25, n34, n38, n40, n41, n50, n51, n66, n70, n74, n75, n76, n80, n84, n86	n77,n78, n79	
4G LTE Bands	B5, B6, B8, B12, B13, B14, B17, B18, B19, B20, B26, B27, B28, B29, B44, B67, B68, B71, B85	B1, B2, B3, B4, B7, B9, B10, B11, B21, B23, B24, B25, B30, B32, B33, B34, B35, B36, B37, B38, B39, B40, B41, B45, B50, B51, B65, B66, B69, B70, B74, B75, B76	B22, B42, 43, B48, B49, B52	B46, B47, B252, B255
3G CELL Bands	B5, B6, B8, B12, B13, B14, B19, B20, B26	B1, B2, B3, B4, B7, B9, B10, B11, B21, B25, B32, B33, B34, B35, B36, B37, B38, B39, B40	B22	
2G CELL Bands	710, 750, 810T, 850, 900P, 900E, 900R	1800DCS, 1900PCS		
CDMA CELL Bands	BC0, BC2, BC3, BC7, BC9, BC10, BC12, BC18, BC19	BC1, BC4, BC6, BC8, BC13, BC14, BC15, BC16, BC20, BC21		
Return Loss (dB)	~-6.1	~-15.5	~-9.2	~-8.0
VSWR	~3.5:1	~1.6:1	~2.3:1	~2.3:1
Efficiency (%)	~43.9	~63.9	~36.8	~31.1
Peak Gain (dBi)	~1.9	~4.7	~1.9	~1.4
Average Gain (dBi)	~-3.7	~-2.0	~-4.4	~-5.1
Impedance (Ohms)	50			
Polarisation	Linear			
Radiation Pattern	Omni-directional			
Max I/P Power (W)	25			
Connector Type	SMA male standard (other connectors available)			
Cable Length	300cm standard (other lengths available)			
Cable Type	DACAR 302 (other cables available)			

Measurement conditions:

- Mounted on 30 x 30 x 0.25cm ABS plate
- 1 meter of DACAR 302 cable
- Measured in certified CTIA 3D Anechoic chamber


Cable 3

Active Parameters	GPS/GLONASS antenna	
Standards	GPS/QZSS/Galileo	GLONASS
Band (MHz)	1575	1602
Frequency (MHz)	1575.42	1598 - 1610
Patch Size (mm)	25 x 25 x 4	
Return Loss (dB)	≤-15	
VSWR	≤1.4:1	
Impedance (Ohms)	50	
Polarisation	RHCP	
SAW Filter	Pre filter	
Radiation Pattern	Hemispherical	
Active Gain (dB)	28 @ 2.7V	
Noise Figure (dB)	1.5 typ.	
Voltage (V)	1.5 – 3.6	
Current (mA)	9 typ.	
Power Consumption (mW)	24.3 max	
ESD Protection (kV)	2	
Connector Type	SMA male standard (other connectors available)	
Cable Length	300cm standard (other lengths available)	
Cable Type	LMR100 standard (other cables available)	

2. Mechanical and environmental specifications



Mounting Type	Adhesive mount
Dimensions (mm)	80 x 76 x 16
Radome	ABS UV stable
Radome Color	Black or white
Operating Temperature (°C)	-40 to +85
Storage Temperature (°C)	-40 to +85
Substance Compliance	RoHS




3. Antenna drawings

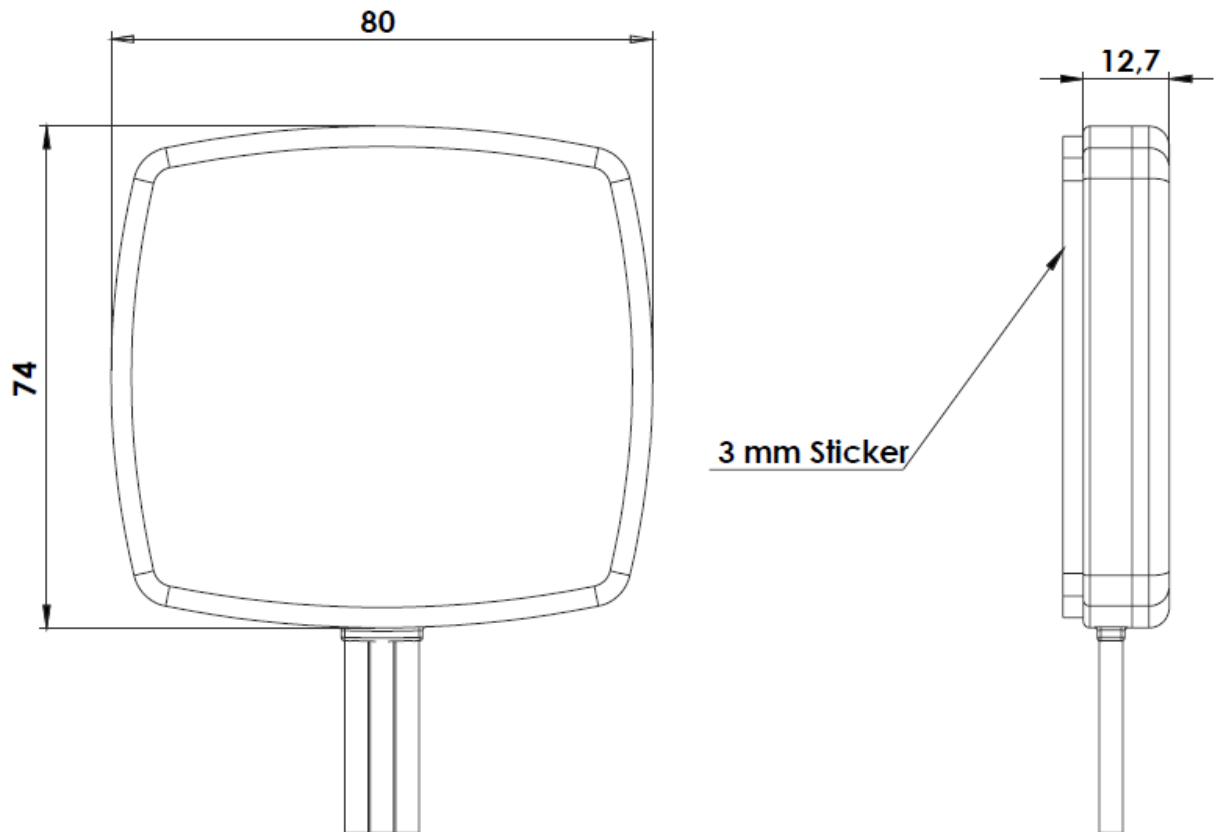



4. Antenna parameters




Cable 1: 5GNR

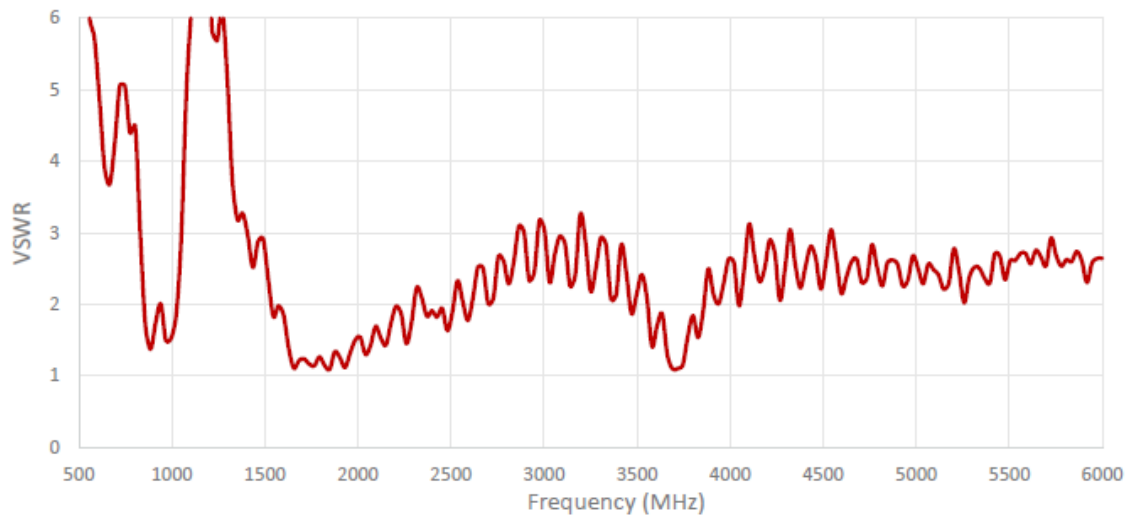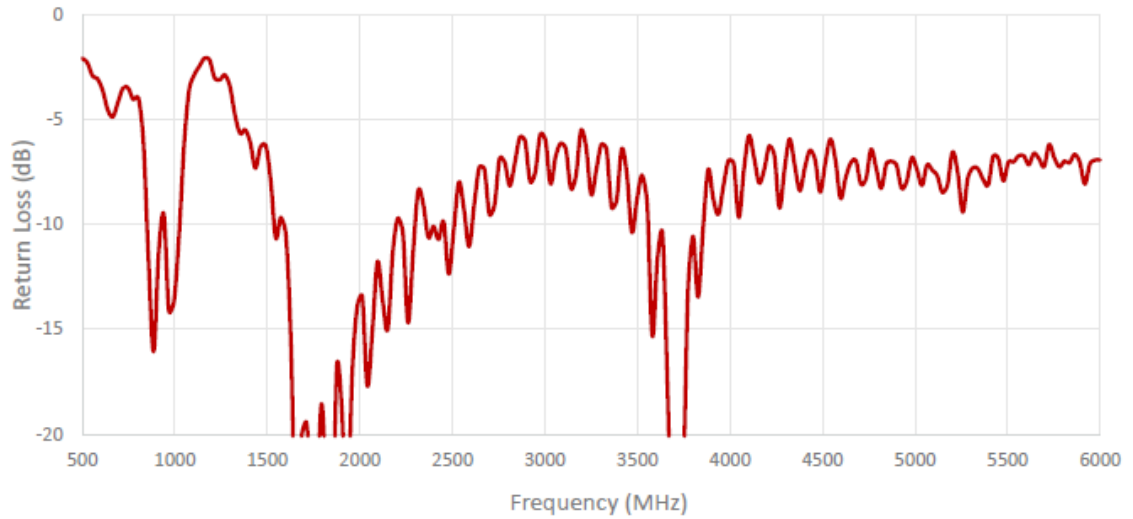

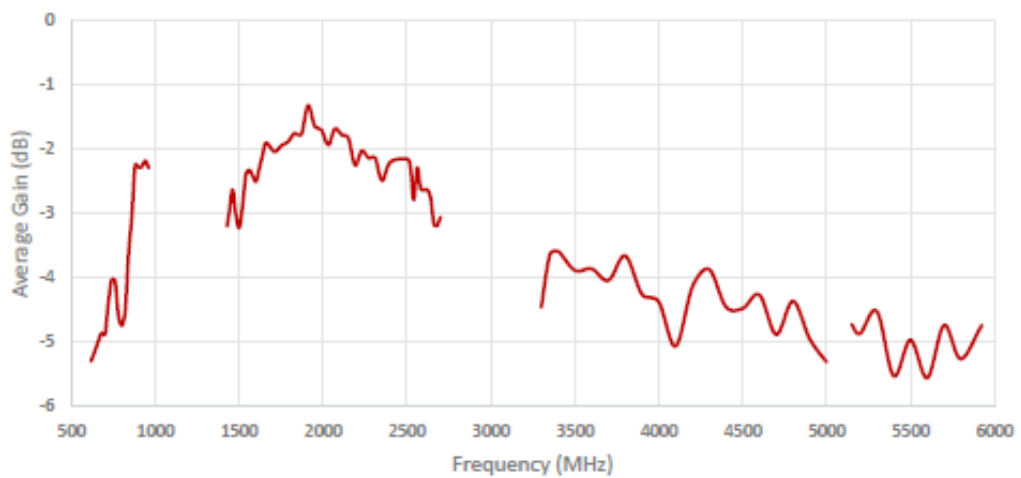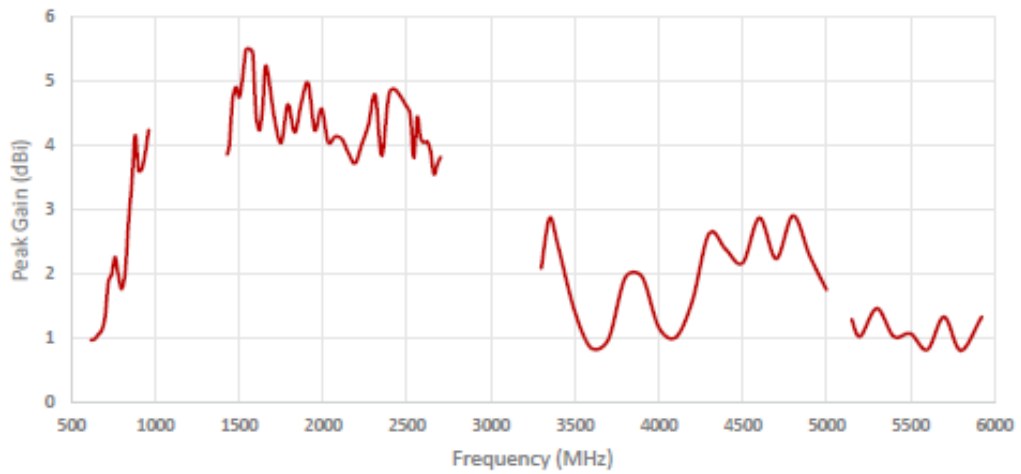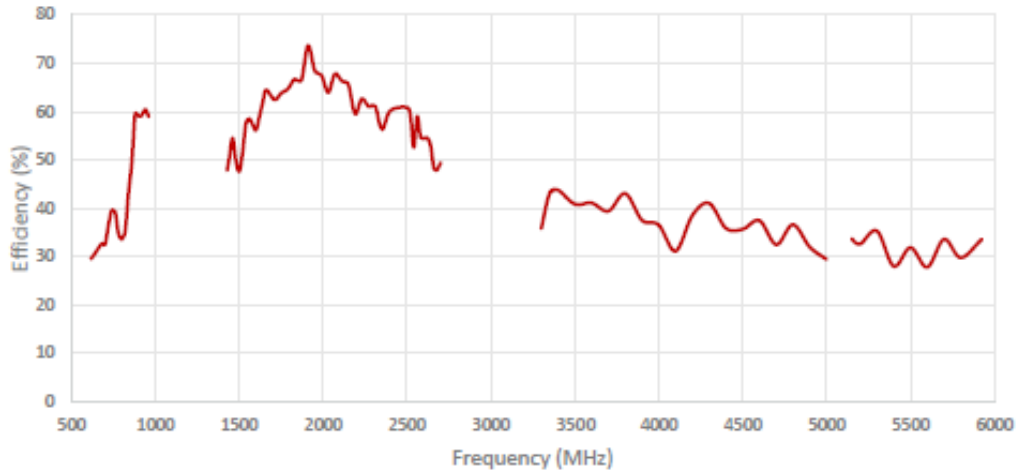


Cable 2: 5GNR

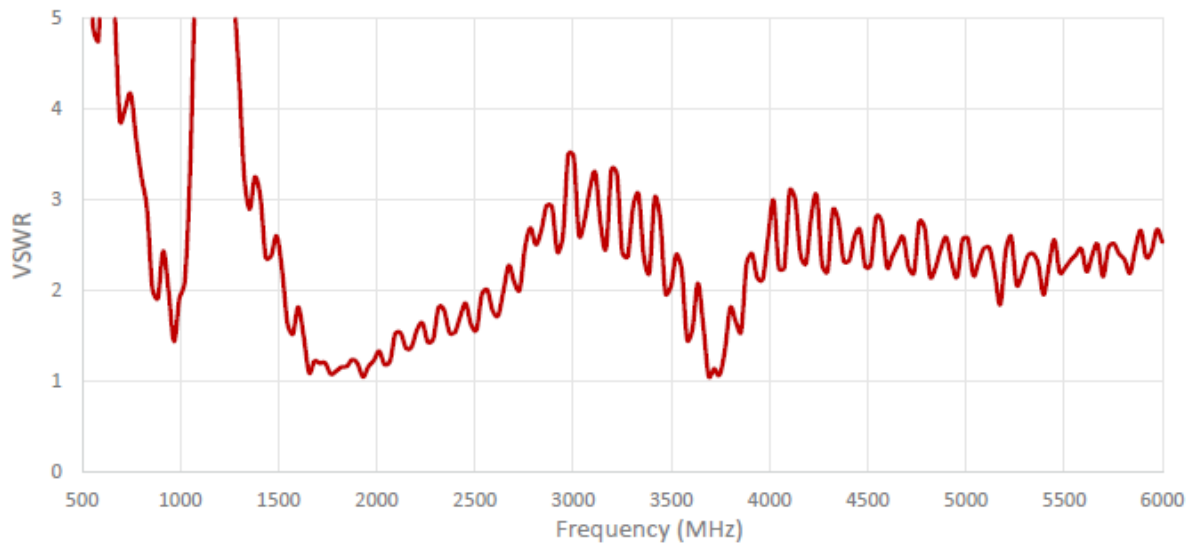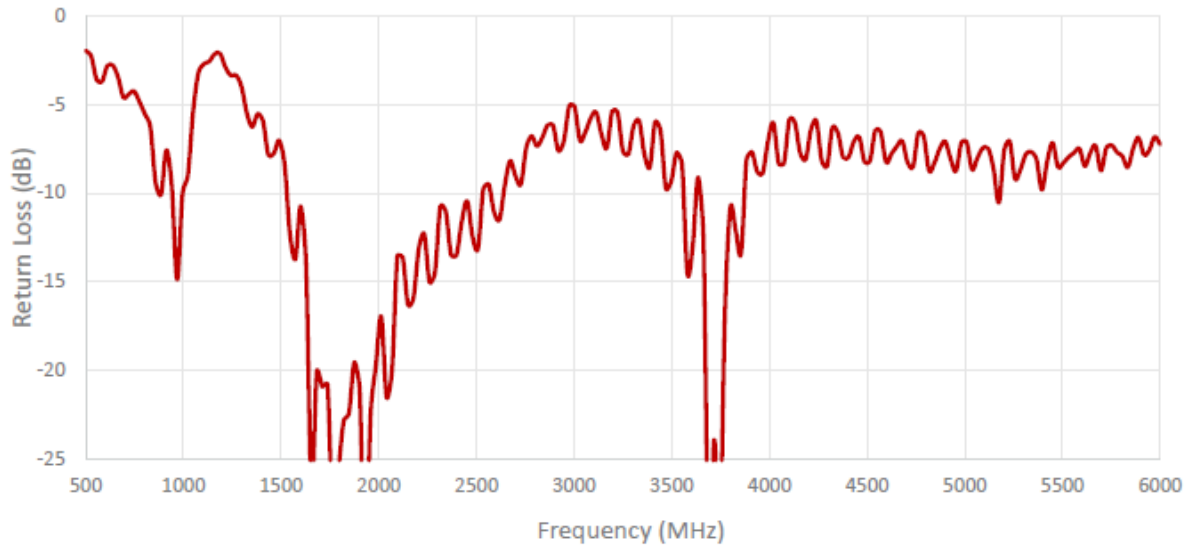


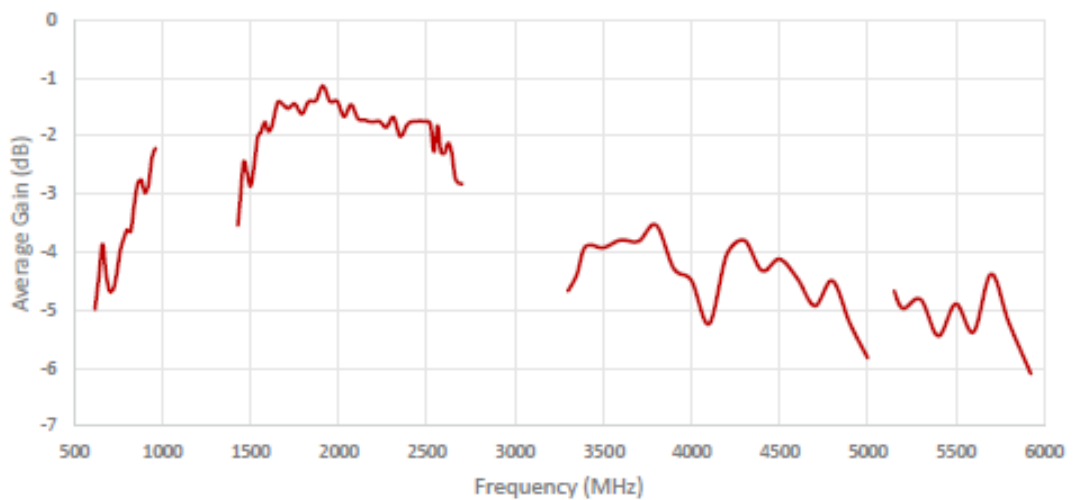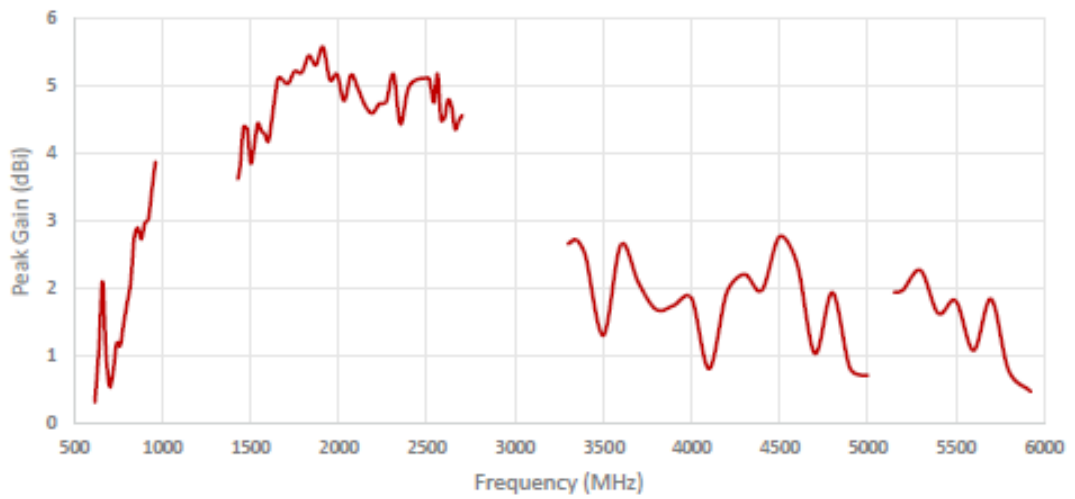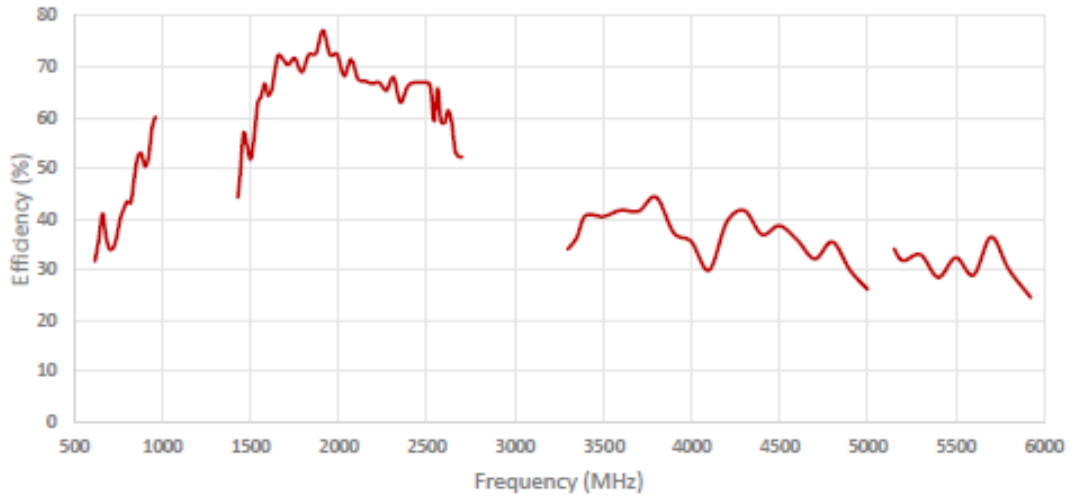


ISOLATION FOR CABLES 1 AND 2

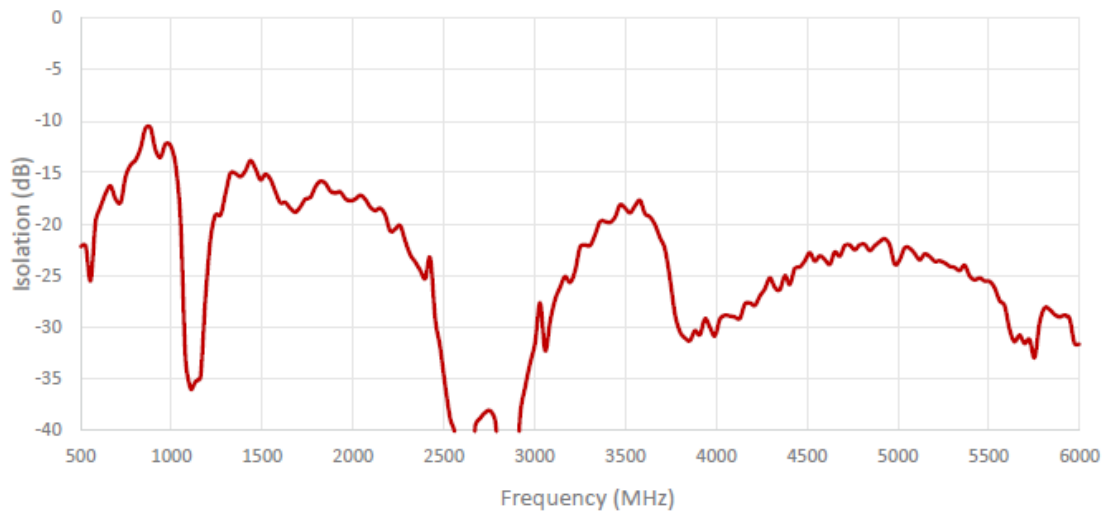



ENVELOPE CORRELATION COEFFICIENT FOR CABLES 1 AND 2

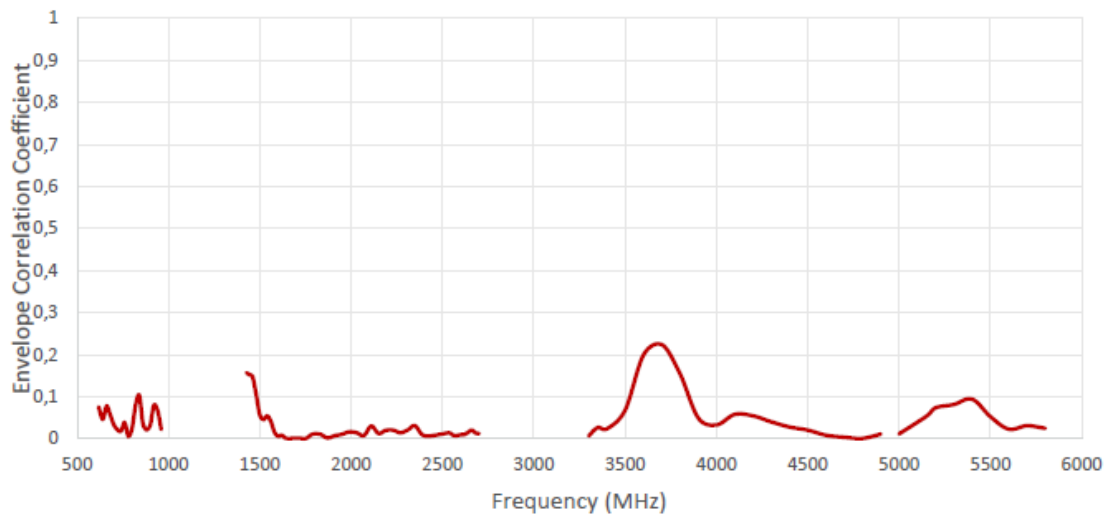

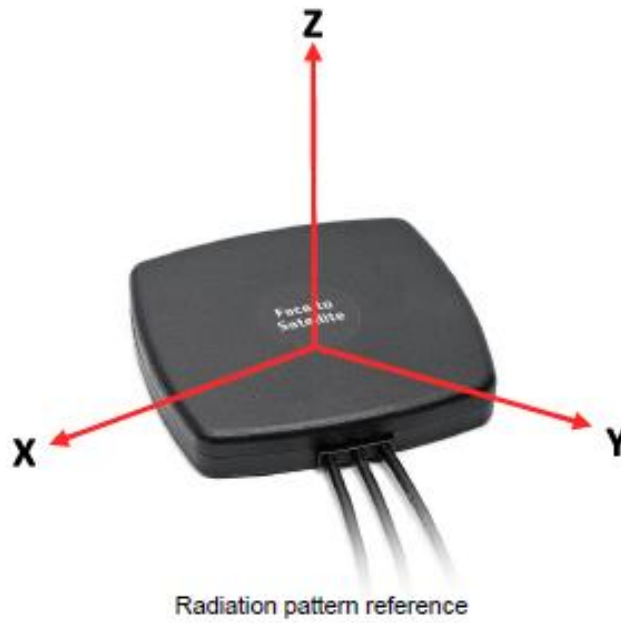


Cable 1: 5GNR

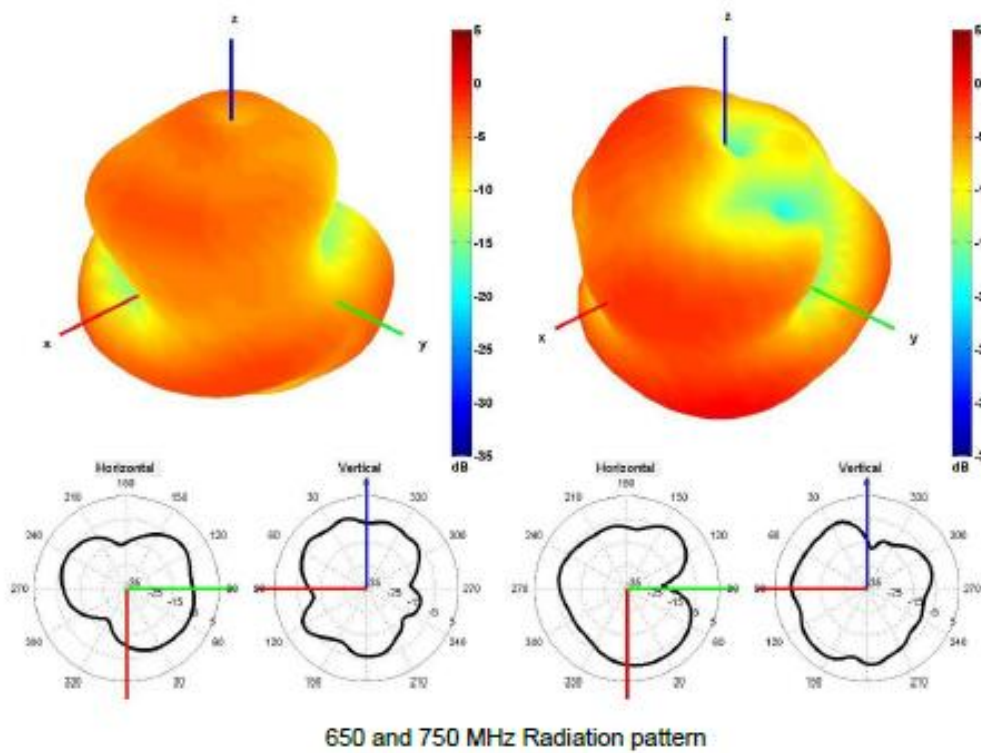


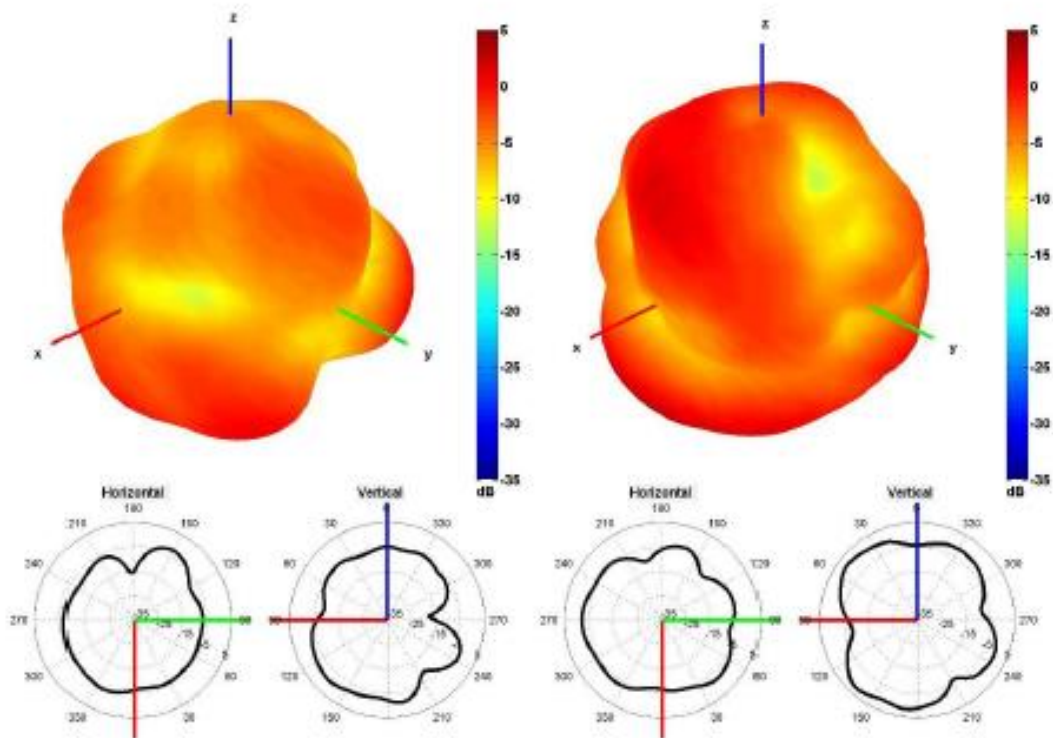


850 and 940 MHz Radiation pattern

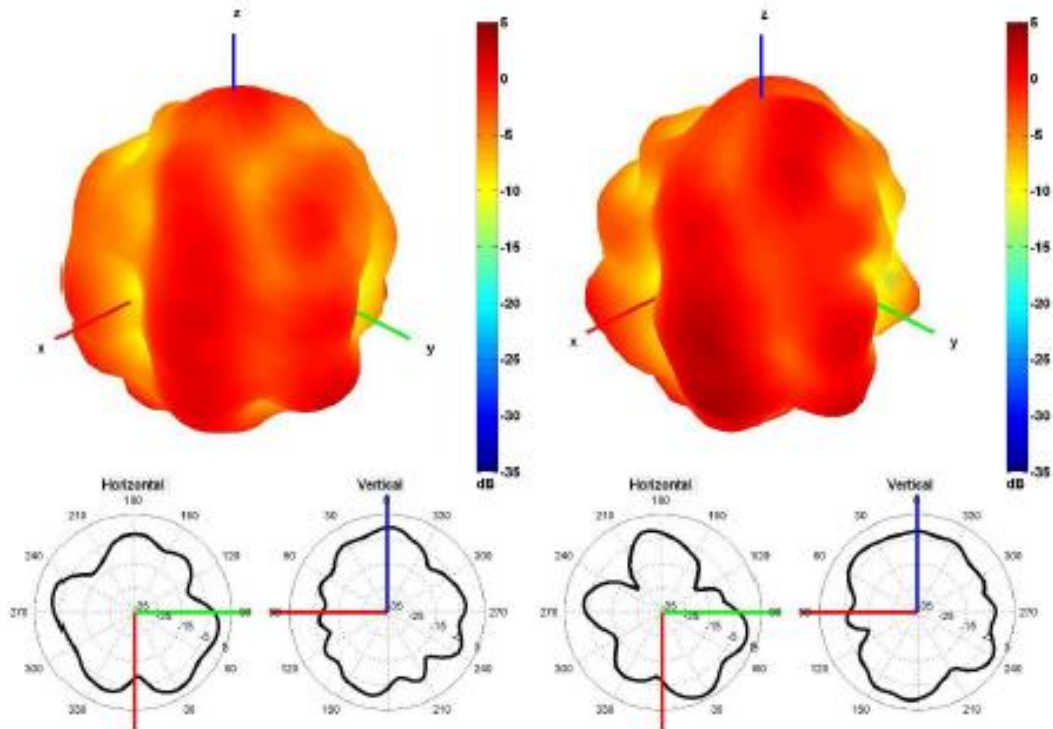


1500 and 1600 MHz Radiation pattern

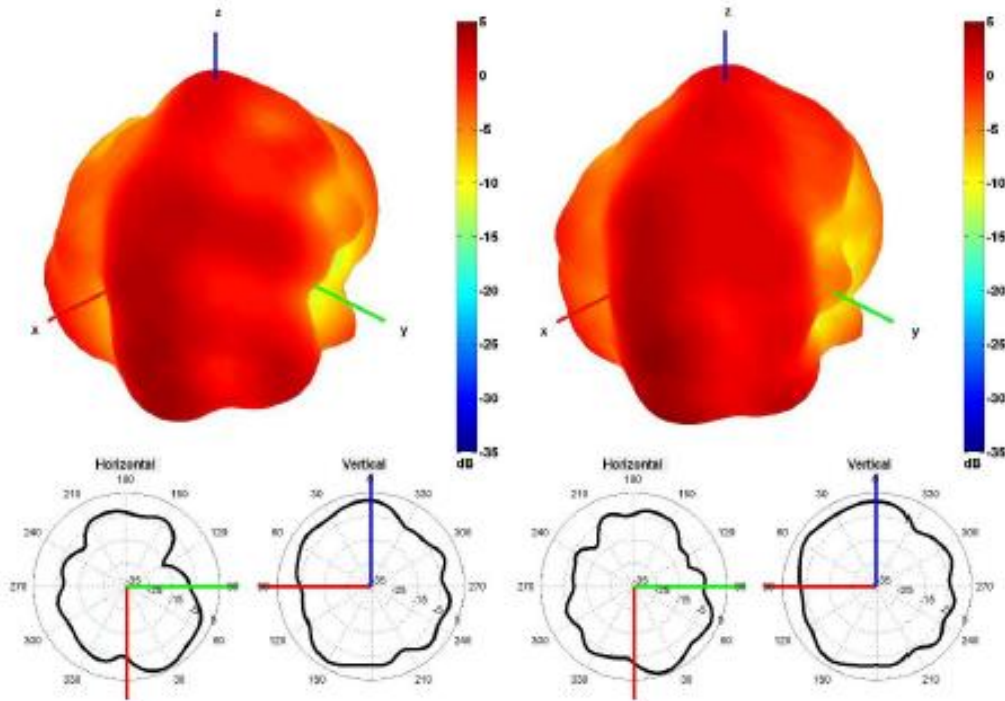


1750 and 1850 MHz Radiation pattern

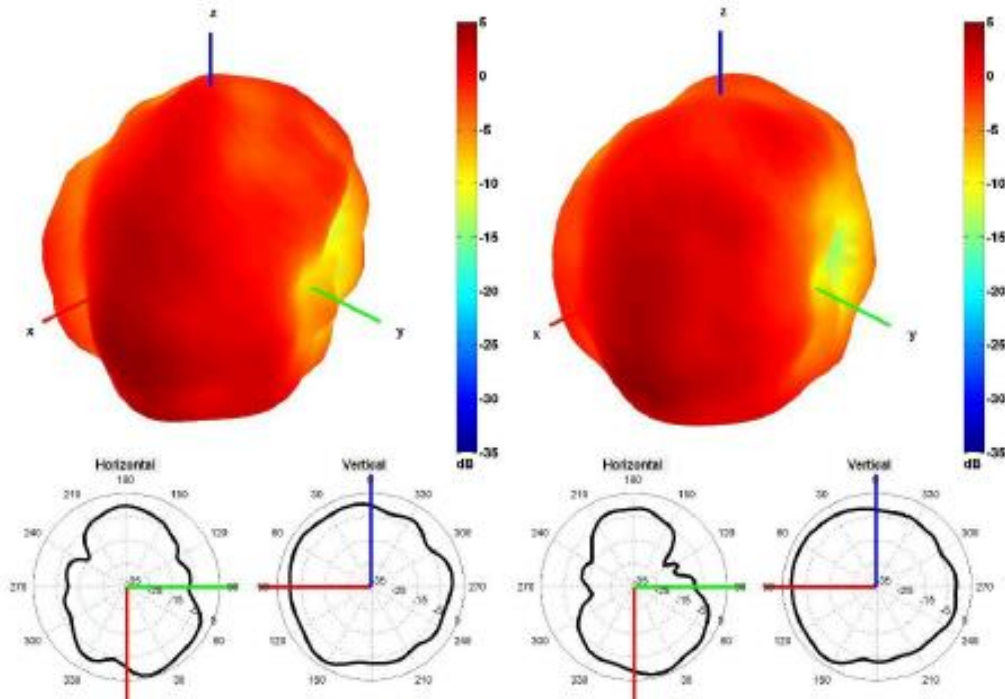


1950 and 2100 MHz Radiation pattern

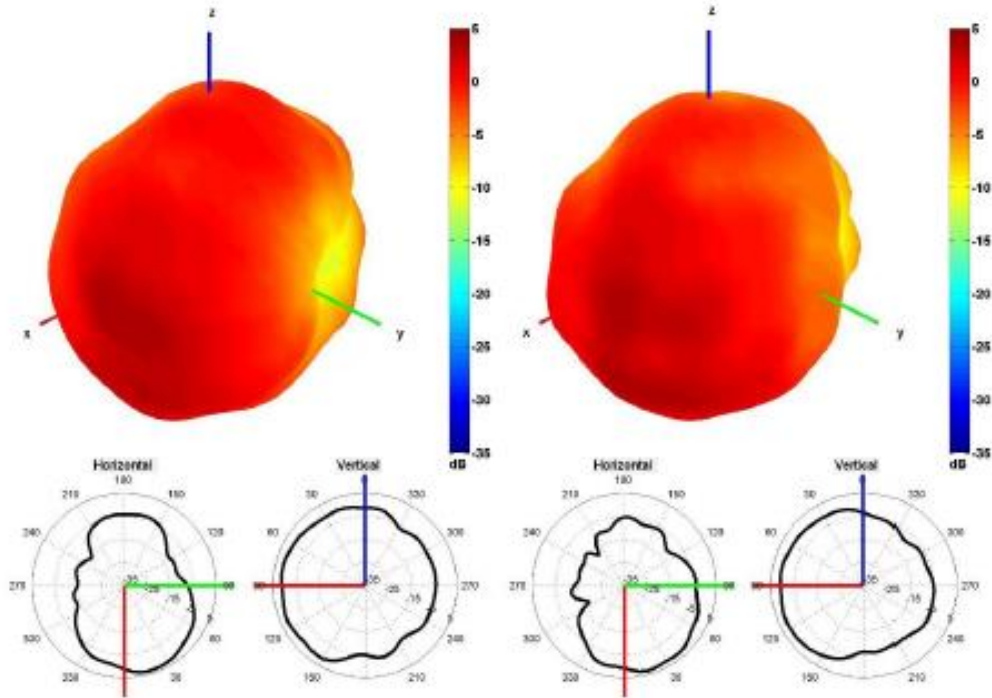

2350 and 2600 MHz Radiation pattern

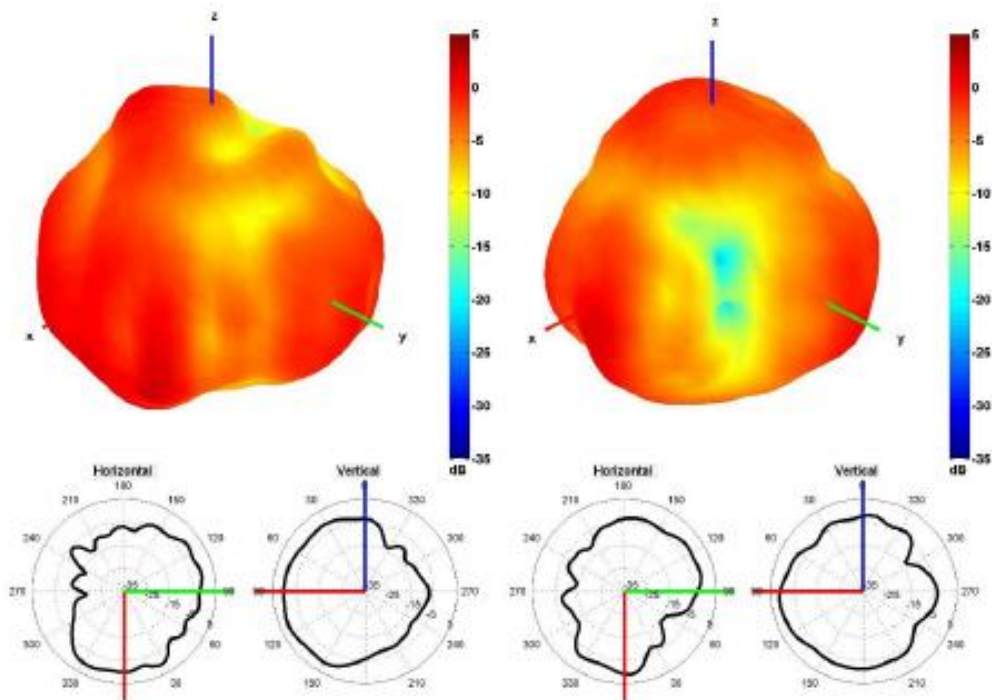


3350 and 3600 MHz Radiation pattern

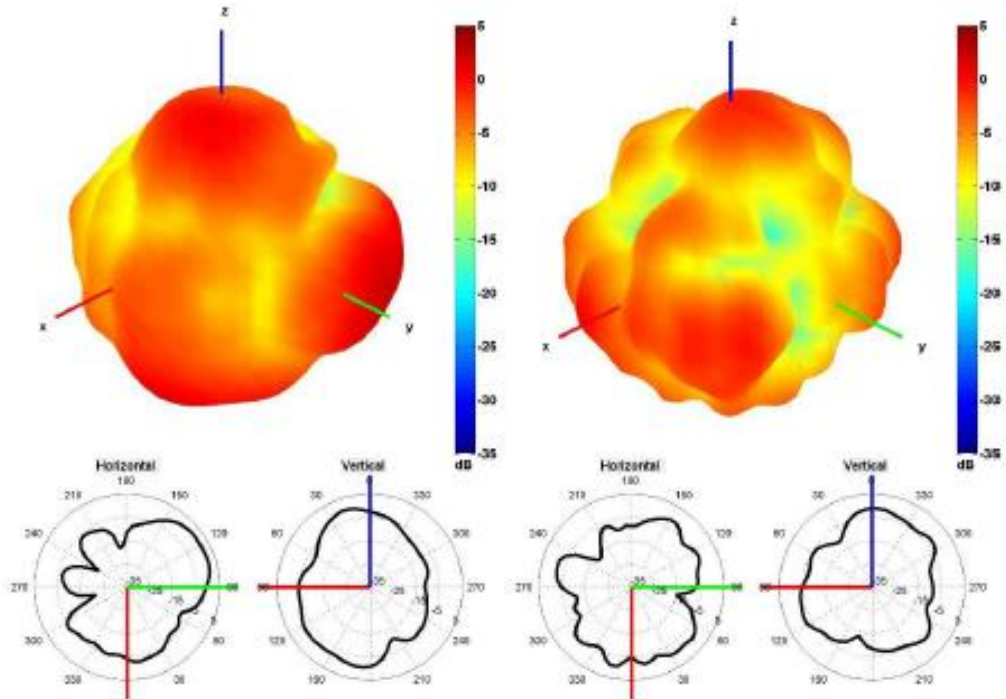


4500 and 5500 MHz Radiation pattern


Table 2: 5GNR

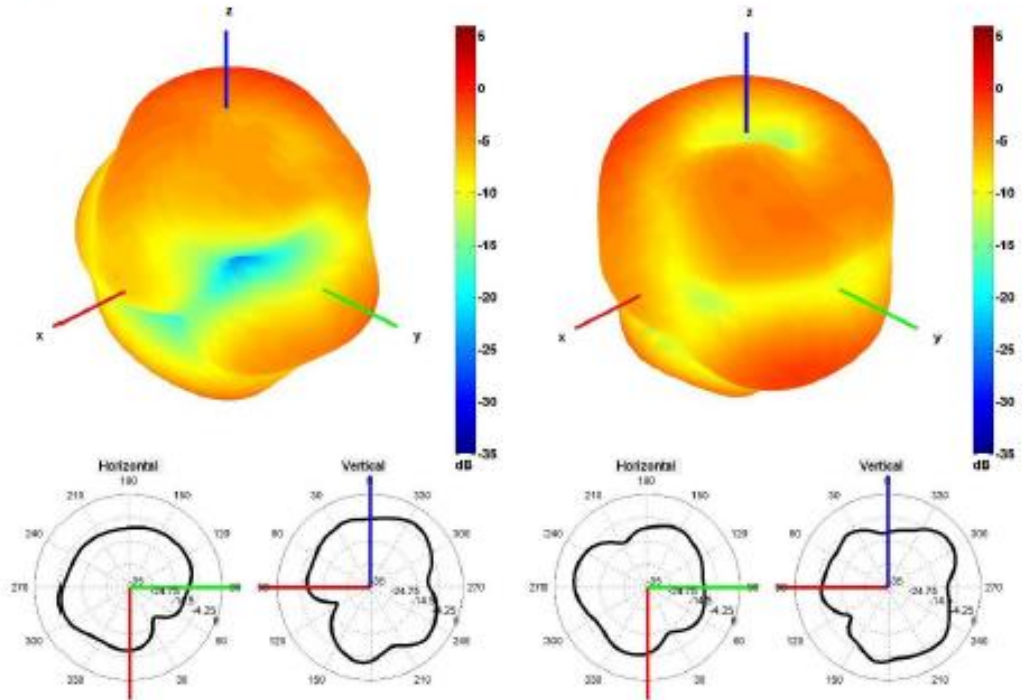


650 and 750 MHz Radiation pattern

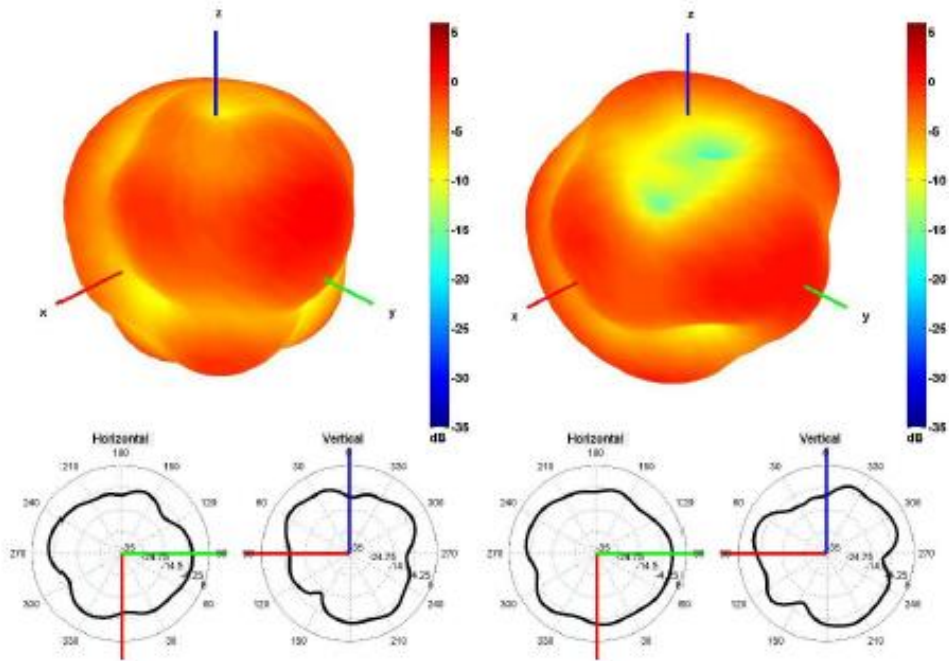


850 and 940 MHz Radiation pattern

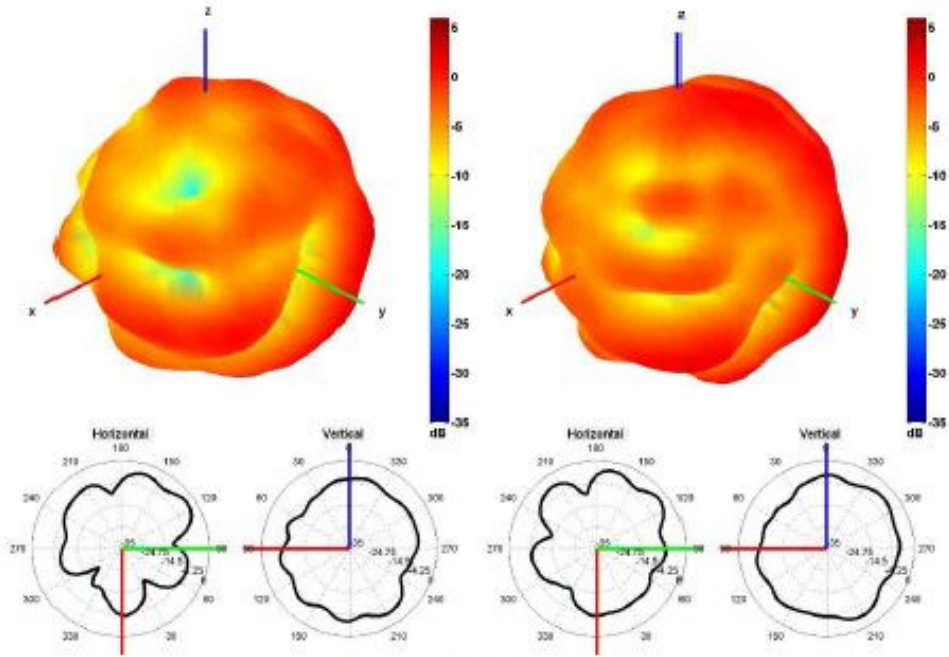


1500 and 1600 MHz Radiation pattern

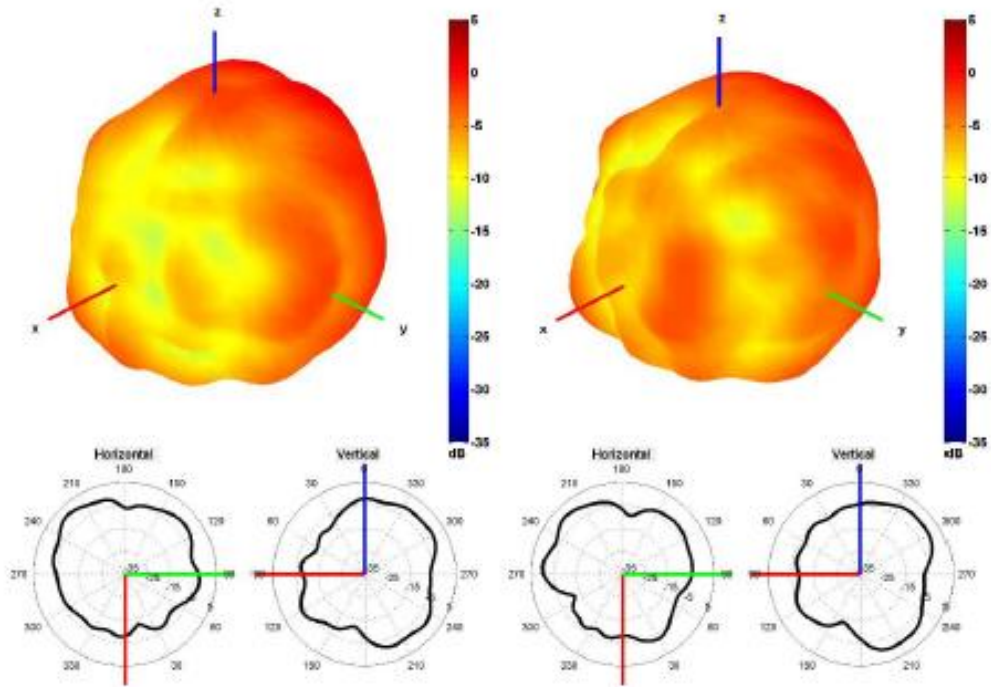


1750 and 1850 MHz Radiation pattern

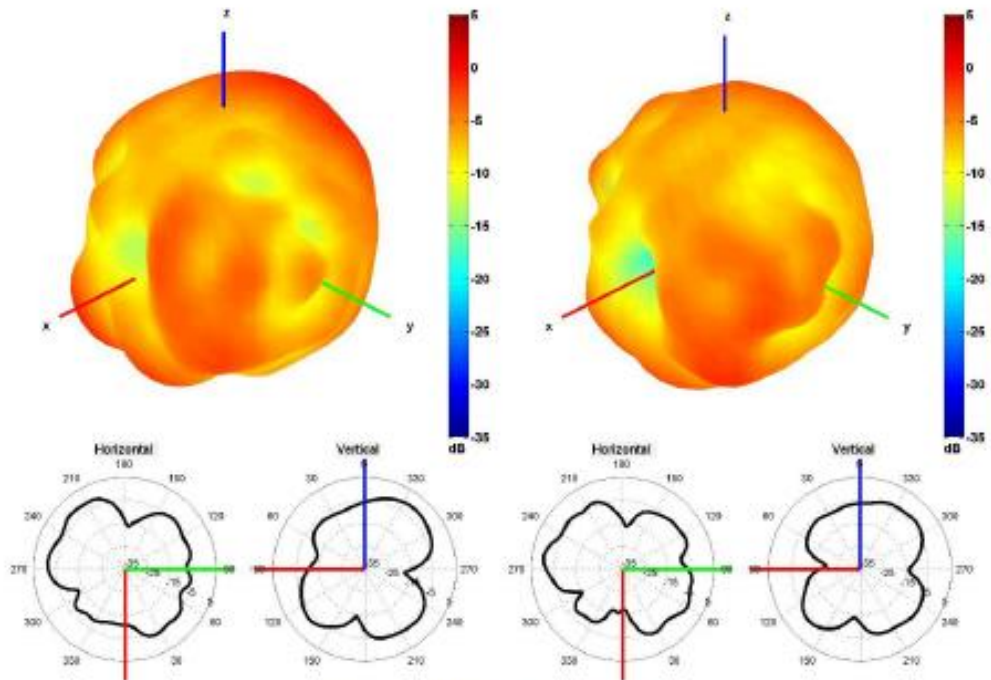


1950 and 2100 MHz Radiation pattern

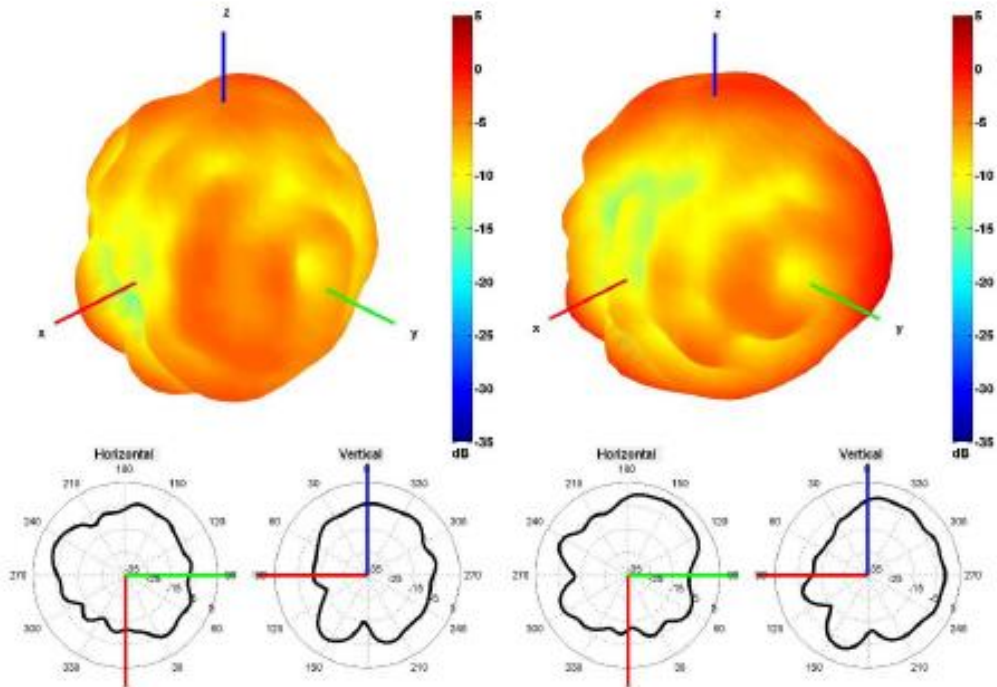

2350 and 2600 MHz Radiation pattern

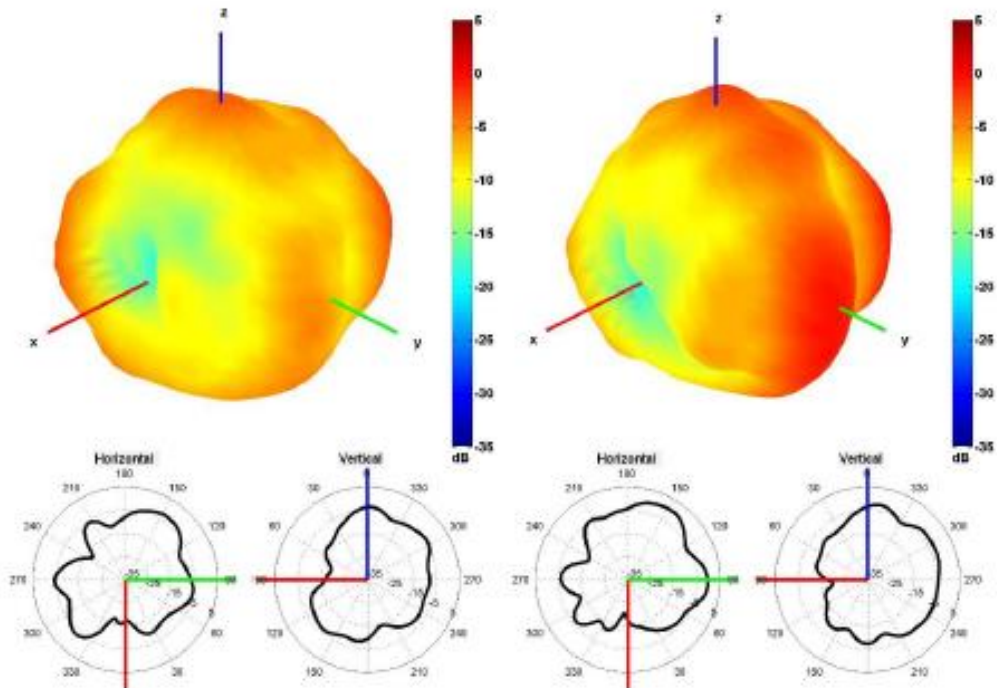

3350 and 3600 MHz Radiation pattern

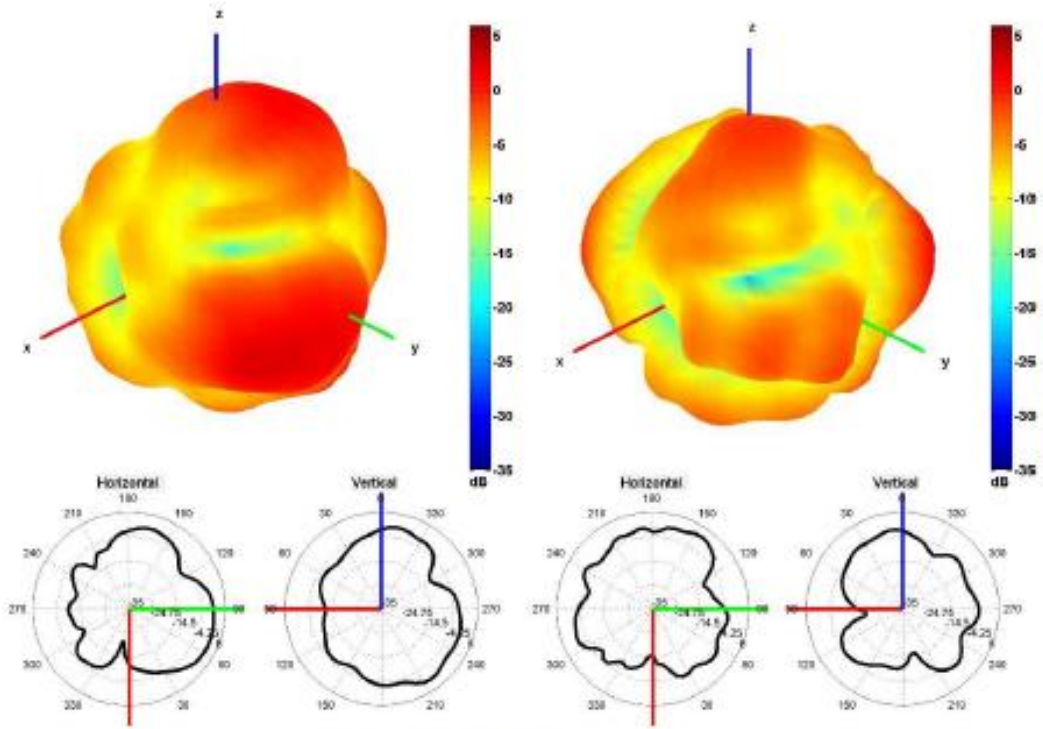

4500 and 5500 MHz Radiation pattern